




Douglas Electrical Components

Ductorseal® Hermetic Feedthrus

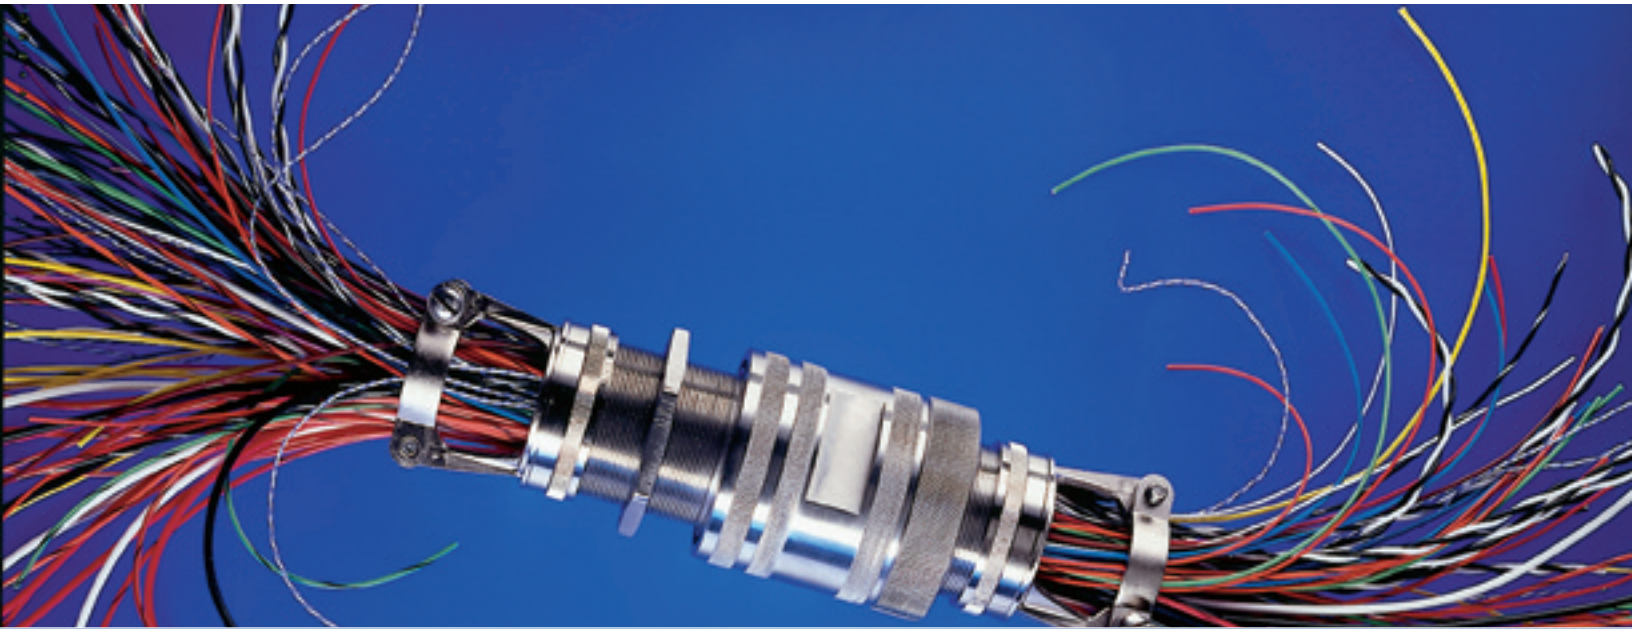

Hermetics

Product Catalog



About Douglas Electrical

Douglas Electrical Components pioneered the development and practical application of epoxies to feedthru technology in 1977. Our first product was an NPT epoxy body sealing short lengths of #14 and #24 AWG wires. From that first innovative wire harness feedthru we developed the product lines which are offered in the following pages.

The evolution of these product lines has been in response to solving conductor sealing problems which our customers brought to us.

It is this precept which has resulted in the diversification of the product - virtually every product innovation has been in response to a design challenge by a customer.

One of our first challenges was to convince potential customers that our epoxy seal technology was valid for the range of operating environments. We are now accepted for applications over an astonishing dynamic

range... 1×10^{-9} Torr through 15,000 psi. Our products have been used from 4°K (LHe) through 200°C. And we do seal.

The conductors that we have sealed include AWG #38 through 500MCM wires, cables and harnesses. Conductor counts have ranged from single wires through 3,200 wires in a single feedthru, cable lengths have ranged from "stubs" through 2,000 meters.

As an example of our capabilities for size and quantity, we have produced one-of-a-kind special assemblies that weigh 2,000lbs. and have produced production lot sizes to 20,000 pieces per year.

We are interested in working with you in developing high quality solutions to your conductor sealing problems and look forward to meeting your challenge.

Edward W. Douglas
President

Table of Contents

Sealed Wire & Cable Assemblies

2-11

These feedthru seals provide a sealed interconnecting harness in a single, pre-tested, ready-to-install assembly. Virtually any wire, cable, or harness can be hermetically sealed.

Sealed Connectors

12-43

Many applications cannot use the wire harness feedthru approach because of a requirement to have a disconnectable circuit at the pressure bulkhead or vacuum port plate. PotCon™ hermetically sealed connectors are easily specified from these tables.

Sealed Studs and Motor Terminals

44-47

These StudSeal® feedthrus are widely used in transformers, hermetically sealed compressors, pumps and vacuum or pressure chambers for motor terminal leads, heater circuits or current stud terminals.

Unique Feedthrus

48-55

Special feedthrus have been fabricated to solve numerous conductor sealing applications. A number of approaches are presented in this section ranging from systems weighing one ton, containing thousands of conductors to tiny, single conductor models.

Technical Data

56-61, 64

We have compiled a collection of conversions, constants, and data which will be of use to designers and users of feedthrus.

Index

62-63

Sealed Wire Harness Feedthru Assemblies

This section describes our unique line of sealed conductors, including wires, cables, and harnesses. We can permanently and hermetically seal virtually any conductor through any housing.

Advantages of Direct Wire Harness Hermetic Feedthrus:

- You can specify the exact conductors you need.
- You can purchase a complete interconnecting harness which is pre-wired and pre-tested; ready to install.
- Typical problems associated with connectors or “pin” style feedthrus are eliminated... no more bent pins, mismatched connector sets, miswired harnesses, spurious readings due to contact resistance or special order delays.
- Cables can be functionally grouped without having to allocate circuits based on connector pin sizes, counts, insert arrangements, polarization, or clocking.
- Wires, cables, or harnesses can be “mixed and matched” according to function and routing considerations. For example, a single feedthru/harness can contain a mixture of copper wires, fiber optic cables, thermocouples (including different alloys), power cables, shielded pairs, triplets, and quads.
- There is a significant cost and schedule savings realized over hermetic connectors.
- The circuit density (number of circuits per square inch of port plate) can be increased by a factor of up to 10, versus hermetic pin and socket connectors. This can eliminate entire ports or penetration plates and can free up existing space for other circuits or penetrations.

The product line is described in three sections:

Standard Wire Harness Feedthru

The user selects an appropriate housing, then selects a wire bundle from a list of standard bundles. The bundle lengths on each side of the housing may be specified. See pages 4 through 6.

Custom Wire Harness Feedthrus

The user may select an appropriate standard housing, then specify the exact wire bundle needed for the application. The bundle length on each side of the housing may be specified. See pages 7 through 9.


Application Engineered Wire Harness Feedthrus

For situations that don't lend themselves to solutions with either a standard or a custom harness, we can design a feedthru explicitly for your application. The feedthru design can include the exact conductor/harness you need as well as the housing or enclosure for the best installation. In fact, most of our OEM accounts are using feedthrus that have been Application Engineered for their specific needs. Please turn to page 8 for a discussion of our various capabilities.

Table of Contents

A Typical Wire Harness Feedthru	3
General Notes, Specifications	3
Standard Wire Harness Feedthrus	
NPT Housings	4
Pressure Housings	5
Vacuum Housings	6
Custom Wire Harness Feedthrus	
Custom Feedthrus Fabricated To Your Specifications	7
Custom Wire Harness Feedthrus In Standard Housings	
Design Instructions And Worksheet	8
Conductor Data	9
Standard Housing Data	10-11

A Typical Wire Harness Feedthru

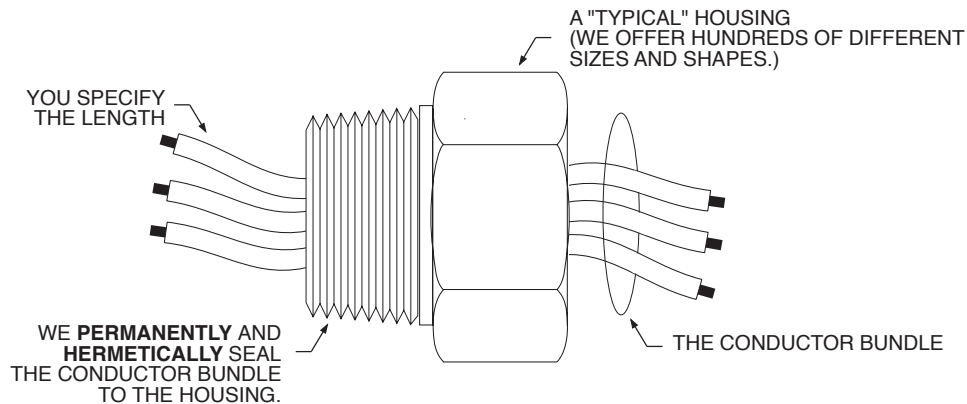

General Notes, Specifications

Material Specifications

Brass:

ANSI CDA 360

Stainless Steel:

300 Series

Epoxy:

See below

Insulation:

As described in charts

Pressure or Vacuum Limits (-40°F to +250°F)*

Housing	Vacuum Limit	Pressure Limit
NPT Plugs	1x10 ⁻⁶ Torr	600 PSI
NPT Nipples	1x10 ⁻⁶ Torr	600 PSI
NPT In-Line Adapter	1x10 ⁻⁶ Torr	600 PSI
Straight Thread	1x10 ⁻⁷ Torr	1000 PSI
Vacuum Face Seal	1x10 ⁻⁹ Torr	100 PSI
Vacuum Flange	1x10 ⁻⁹ Torr	100 PSI
Radial "O" Ring	1x10 ⁻⁹ Torr	15,000 PSI

*Consult us if higher limits are needed.

Epoxy Characteristics

Vacuum Outgassing:

25mm² x 1mm sample at 125°C vs optical condensing surface at 25°C, <1 x 10⁻⁶mm Hg

RESULTS: <0.22% Wt Loss and <0.002% VCM. No visible deposits on the condensing plate.

Thermal Conductivity: 10 BTU in/hr ft² °F

Volume Resistivity: 5x10¹⁶ Ωcm

Specific Gravity: 2.3

Dielectric Constant: 60 Hz 6.5, 1 KHz 6.3, 1 MHz 5.9

Thermal Expansion: 29 X 10⁻⁶/ °C

Maximum Service Temperature of Epoxy: 300°F

Water Absorption: <0.15% in 7 days

Dielectric Strength: 550v/mil

Water Vapor Transmission (Per ASTM E-96-80):

0.7 ± 0.2 gms/m² day, 0.125 mil sample thickness

Flame Resistance:

UL File No. E92366 rated UL-94HB




Also tested at White Sands by NASA:

WSTF 79-11713, JSC #0945, NASA NHB 8060.1A. Passed. Self extinguished and no ignition @ 130 amps on a #12 AWG wire.

L.O.C.A. Radiation Withstand:

@ 1.5 x 10⁶ Rads/hr for 200 x 10⁶ Rads total. Leakage to He <3.0 x 10⁻⁸ Std cc He/sec, Pin-Pin resistance>1x10¹² Ω.

Standard Wire Harness Feedthrus (NPT Housings) *

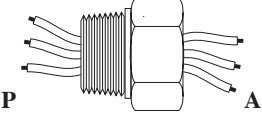
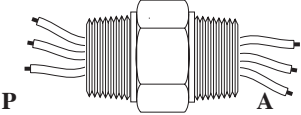
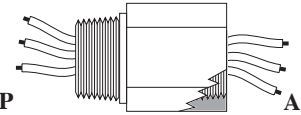
												
Type		NPT Plug				NPT Nipple				NPT In-Line Adapter		
Material		Brass				Brass				Brass		
Size		3/8"	1/2"	3/4"	1"	3/8"	1/2"	3/4"	1"	1/2"	3/4"	1"
Stranded, MIL -spec #24 AWG 1000v Teflon® Insulation	3	28000	28003	28013	20830	28052	28055	28065	28082	28105	28115	28130
	6	28001	28004	28014	28031	28053	28056	28066	28083	28106	28116	28131
	12	--	28005	28015	28032	--	28057	28067	28084	28107	28117	28132
	20	--	--	28016	28033	--	--	28068	28085	--	28118	28133
	32	--	--	--	28034	--	--	--	28086	--	--	28134
Stranded, MIL -spec #20 AWG 1000v Teflon® Insulation	3	--	28006	28017	28035	--	28058	28069	28087	28108	28119	28135
	6	--	28007	28018	28036	--	28059	28070	28088	28109	28120	28136
	12	--	--	28019	28037	--	--	28071	28089	--	28121	28137
	20	--	--	28020	28038	--	--	28072	28090	--	--	28138
	32	--	--	--	28039	--	--	--	28091	--	--	28139
Stranded, MIL -spec #16 AWG 1000v Teflon® Insulation	3	--	28008	28021	28040	--	28060	28073	28092	28110	28122	28140
	6	--	28009	28022	28041	--	28061	28074	28093	28111	28123	28141
	12	--	--	28023	28042	--	--	28075	28094	--	28124	28142
	20	--	--	--	28043	--	--	--	28095	--	--	28143
	32	--	--	--	--	--	--	--	--	--	--	--
Stranded, MIL -spec #12 AWG 1000v Teflon® Insulation	3	--	28010	28024	28044	--	28062	28076	28097	28112	28125	28144
	6	--	--	28025	28045	--	--	28077	28098	--	28126	28145
	12	--	--	--	28046	--	--	--	28099	--	--	28146
	20	--	--	--	--	--	--	--	--	--	--	--
	32	--	--	--	--	--	--	--	--	--	--	--
Thermocouple #24 AWG Duplex Teflon® Insulation ISA Type E, J, K or T	2	28002	28011	28026	28047	28054	28063	28078	28100	28113	28127	28147
	5	--	28012	28027	28048	--	28064	28079	28101	28114	28128	28148
	10	--	--	28028	28049	--	--	28080	28102	--	28129	28149
	20	--	--	28029	28050	--	--	28081	28103	--	--	28150
	30	--	--	--	28051	--	--	--	28104	--	--	28151
	40	--	--	--	--	--	--	--	--	--	--	--
	60	--	--	--	--	--	--	--	--	--	--	--

* Housing dimensions are on page 10 and 11.

To Order: Specify the catalog number of the housing style, wire style, and count you need. For copper conductors, append two dash numbers for the **A** lead length and the **P** lead length

(in feet) respectively, i.e.: **28010-3-4** is a 28010 feedthru whose **A** lead length is 3 feet and **P** length is 4 feet. For the thermocouples, add another suffix after the length suffixes specifying the ISA code, i.e.: **28013-3-4 Type J**.

Standard Wire Harness Feedthrus (Pressure Housings) *

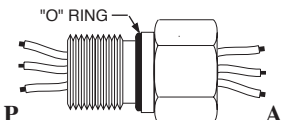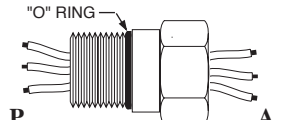
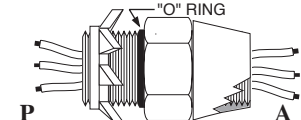
									
Type	SAE		Face Seal Housing, Pressure Appl.			Bullet Hub			
Material	Stainless Steel		Stainless Steel			Steel (Zinc Chromate)			
Size	3/4"	1-1/16"	1/2"	3/4"	1-1/16"	1/2"	3/4"	1"	
Stranded, MIL -spec #24 AWG 1000v Teflon® Insulation	3	28155	28168	28185	28189	28196	28213	28226	28248
	6	28156	28169	28186	28190	28197	28214	28227	28249
	12	28157	28170	--	--	28198	28215	28228	28250
	20	--	28171	--	--	28199	28216	28229	28251
	32	--	--	--	--	28200	--	28230	28252
Stranded, MIL -spec #20 AWG 1000v Teflon® Insulation	3	28158	28172	28187	28191	28201	28217	28231	28253
	6	28159	28173	--	28192	28202	28218	28232	28254
	12	28160	28174	--	--	28203	28219	28233	28255
	20	--	28175	--	--	28204	--	28234	28256
	32	--	--	--	--	--	--	28235	28257
Stranded, MIL -spec #16 AWG 1000v Teflon® Insulation	3	28161	28176	--	28193	28205	28220	28236	28258
	6	28162	28177	--	--	28206	28221	28237	28259
	12	--	28178	--	--	28207	--	28238	28260
	20	--	--	--	--	--	--	28239	28261
	32	--	--	--	--	--	--	--	28262
Stranded, MIL -spec #12 AWG 1000v Teflon® Insulation	3	28163	28179	--	--	28208	28222	28240	28263
	6	28164	28180	--	--	28209	--	28241	28264
	12	--	--	--	--	--	--	28242	28265
	20	--	--	--	--	--	--	--	28266
	32	--	--	--	--	--	--	--	--
Thermocouple #24 AWG Duplex Teflon® Insulation ISA Type E,J,K or T	2	28165	28181	28188	28194	28210	28223	28243	28267
	5	28166	28182	--	28195	28211	28224	28244	28268
	10	28167	28183	--	--	28212	28225	28245	28269
	20	--	28184	--	--	--	--	28246	28270
	30	--	--	--	--	--	--	28247	28271
	40	--	--	--	--	--	--	--	28272
	60	--	--	--	--	--	--	--	28273

* Housing dimensions are on page 10 and 11.

To Order: Specify the catalog number of the housing style, wire style, and count you need. For copper conductors, append two dash numbers for the **A** lead length and the **P** lead length

(in feet) respectively, i.e.: **28210-3-4** is a 28210 feedthru whose **A** lead length is 3 feet and **P** length is 4 feet. For the thermocouples, add another suffix after the length suffixes specifying the ISA code, i.e.: **28213-3-4 Type J**.

Standard Wire Harness Feedthrus (Vacuum Housings)*

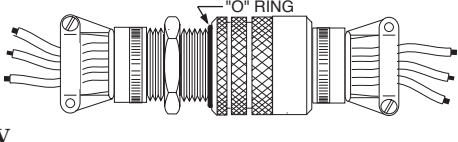
							
Type	Flange (Varian® Style)		Vacuum Face Seal with Cable Clamps				
Material			Stainless Steel Housing, Aluminum Clamps				
Size	1.33"	2.75"	1.00"	1.25"	1.75"	2.75"	
Stranded, MIL -spec #24 AWG 1000v Teflon® Insulation	3	28274	28289	28316	28339	28366	28393
	6	28275	28290	28317	28340	28367	28394
	12	28276	28291	28318	28341	28368	28395
	20	28277	28292	28319	28342	28369	28396
	32	--	28293	28320	28343	28370	28397
Stranded, MIL -spec #20 AWG 1000v Teflon® Insulation	3	28278	28294	28321	28344	28371	28398
	6	28279	28295	28322	28345	28372	28399
	12	28280	28296	28323	28346	28373	28400
	20	28281	28297	28324	28347	28374	28401
	32	--	29298	28325	28348	28375	28402
Stranded, MIL -spec #16 AWG 1000v Teflon® Insulation	3	28282	28299	28326	28349	28376	28403
	6	28283	28300	28327	28350	28377	28404
	12	--	28301	28328	28351	28378	28405
	20	--	28302	28329	28352	28379	28406
	32	--	28303	--	28353	28380	28407
Stranded, MIL -spec #12 AWG 1000v Teflon® Insulation	3	28284	28304	28330	28354	28381	28408
	6	28285	28305	28331	28355	28382	28409
	12	--	28306	28332	28356	28383	28410
	20	--	28307	--	28357	28384	28411
	32	--	28308	--	28358	28385	28412
Thermocouple #24 AWG Duplex Teflon® Insulation ISA Type E,J,K or T	2	28286	28309	28333	28359	28386	28413
	5	28287	28310	28334	28360	28387	28414
	10	28288	28311	28335	28361	28388	28415
	20	--	28312	28336	28362	28389	28416
	30	--	28313	28337	28363	28390	28417
	40	--	28314	28338	28364	28391	28418
	60	--	28315	--	28365	28392	28419

* Housing dimensions are on page 11.

To Order: Specify the catalog number of the housing style, wire style, and count you need. For copper conductors, append two dash numbers for the **A** lead length and the **V** lead length

(in feet) respectively, i.e.: **28310-3-4** is a 28310 feedthru whose **A** lead length is 3 feet and **V** length is 4 feet. For the thermocouples, add another suffix after the length suffixes specifying the ISA code, i.e.: **28313-3-4 Type J**.


Custom Feedthrus Fabricated to Your Specifications

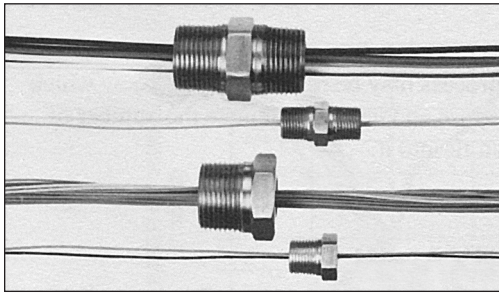

A
B
C
D

Illustrations of various NPT housings with wire harnesses sealed through:


- A - 1" NPT Nipple
- B - 3/8" NPT Nipple
- C - 1" Plug
- D - 3/8" Plug

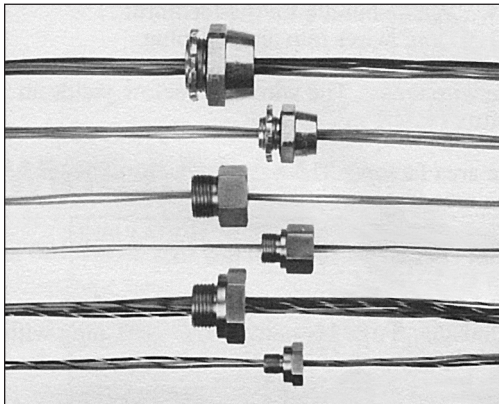

E
F
G
H
I
J

Face Seal "O" Ring pressure housings seal harnesses over wide pressure ranges:


- E & F - NPT Female to Face Seal Bullet Hub housings, 1" and 1/2" sizes
- G & H - 1/16" and 3/4" SAE fittings seal to 3,000 psi.
- I & J - Pressure face seal housings install through bored hole for an easy solution to mounting problems... 1/16" and 3/8" sizes illustrated.

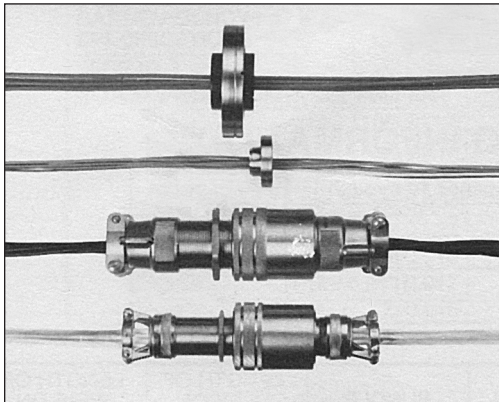

K
L
M
N

Vacuum seals with flange or vacuum face seal housings:

- K & L - 2 3/4" and 1 1/3" Flanges mount easily to conventional vacuum ports.
- M & N - These vacuum feedthrus mount through a hole bored in a port plate. 1 1/4" and 1" shown, available to 4" diameter.

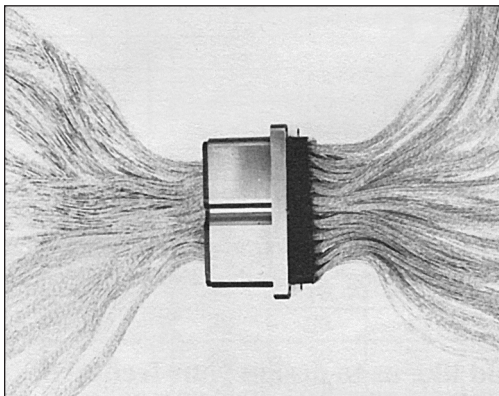

O

Custom Housing:

- O - This housing measures 1 1/4" x 4" and seals 1,024 **PAIRS** of wires.

Custom Wire Harness Feedthrus in Standard Housings

Design Instructions

To specify housings for your custom designed feedthru using the worksheet below:

1. Define your wire "packages". For multiple feedthru jobs, group wires for your convenience either for physical location, electrical considerations (i.e., not having power lines next to low level circuits) or both.
2. For each wire type and gauge, look up the wire area in the wire area table on page 9.
3. For each bundle, look up the area factor in the area factor chart on page 9.
4. For each bundle, multiply the wire area times the area factor. This yields the area of that bundle.
5. For each feedthru, add all the bundle areas to obtain the total harness area.
6. Using the Housing Specifications on pages 10 and 11, select the housing which has an area larger than the total harness area. Please contact us directly if a larger capacity housing or higher density wire packing is needed.

Note that this process may be reversed if you know which housing you require and need to calculate the number of wires which can fit into it.

Design Example

1. Define the wire/cable bundle for the feedthru:
(10) #24 AWG Teflon® wires into an NPT plug.
2. Look up the wire areas: The wire table below yields an area for this wire of 0.009 in².
3. Look up the area factors: The area factor from the table below yields an area factor of 20.
4. Multiply wire area x area factor: 0.009 in² x 20 = 0.180 in² for the bundle's area.
5. Select the housing: Page 10 yields a 1/2" NPT plug with an area of 0.19 in².

Design Worksheet

Wire Bundle Information

Do you want the wires identified with a numbered tag?

☐ Yes or ☐ No

What is your unit of measure for the lead lengths?

☐ Meters ☐ Feet or ☐ Inches

Housing Information

Style (See pages 10-11):

Size:

Material:

Part Number:

Area:

Bundle	Wire ID	AWG	Wire Area	Number of Wires	Area Factor	Bundle Area	Length of Wire on Thread End*	Length of Wire on "Other" End*
1								
2								
3								
4								
5								
6								

* "Thread" End Vs. "Other" End



The NPT, Pressure, and Vacuum Face Seal housings all have obvious "Thread" (male thread) and "Other" ends or there is no difference (NPT Nipples). With Vacuum Flanges and Radial "O" Ring Housings we will use these conventions: Vacuum Flanges will have

the Thread End as the end **without** the epoxy extension. Radial "O" Ring Housing will have the "long" end as the "Thread End".

If you would like us to design your feedthru, please call Toll Free 1.800.533.8068.

Conductor Data

Area Factors

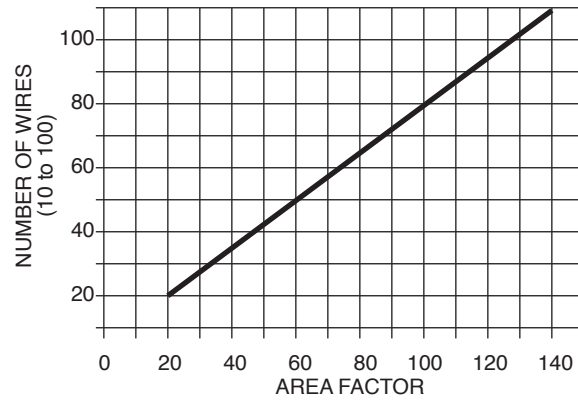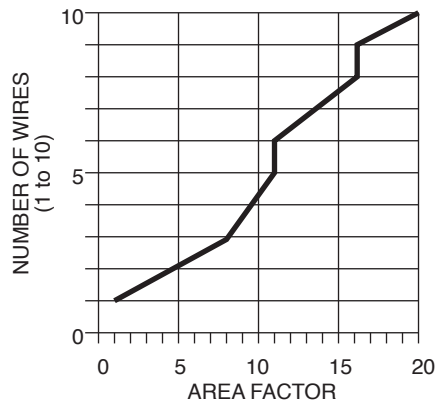

Wire Areas

Insulation	PVC	Tefzel	Teflon	Teflon	Teflon	Teflon	Teflon	Optical Fibers
Temperature	105°C	150°C	200°C	200°C	200°C	200°C	200°C	Inquire about our ability to seal fibers from 50μ thru 110μ.
Voltage	600V	600V	1000V	600V	600V	No Rating	600V	
No. Of Conductors	1	1	1	1	2	1 Pair (Duplex)	1	
Conductor Material	Copper	Copper	Copper	Copper	Copper	Thermocouple	Copper	
Plating	Tin	Silver	Silver	Silver	Silver	Standard Calib.	Silver	
Stranding	See Below	Yes	19X	19X	19x	Solid	Yes	
Shielding	No	No	No	Yes	Yes	No	Coax	
Rating Agency and Specifications	CSA-TEW UL-1015	0.020" Insul.	MIL-W-22759/9	MIL-W-16878/4	MIL-W-16878/4	ISA/ANSI Extension Grade	RG-178 B/U	Fiber
Wire Id	PVC	Tefzel	Single	SS	TSP	E,J,K, or T	Coax	
No. Of Strands or Area	#Str	Area	Area	Area	Area	Area	Area	Area
AWG	10	105	0.043	0.043	0.032	0.108	--	--
AWG	12	65	0.035	0.035	0.026	0.084	0.168	--
AWG	14	41	0.029	--	0.021	0.066	0.130	--
AWG	16	26	0.024	--	0.017	0.054	0.103	--
AWG	18	16	0.021	--	0.014	0.047	0.085	--
AWG	20	10	0.018	--	0.012	0.040	0.068	0.016
AWG	22	7	0.017	--	0.010	0.034	0.057	--
AWG	24	7	0.015	--	0.009	0.032	0.050	0.012


Wire Ampacity (in air)

AWG	105°C Wire Installation				150°C Wire Installation				200°C Wire Installation			
	1 Wire	2-5 Wires	6-15 Wires	16-30 Wires	1 Wire	2-5 Wires	6-15 Wires	16-30 Wires	1 Wire	2-5 Wires	6-15 Wires	16-30 Wires
24	7	6	5	4	8	6	6	4	10	8	6	5
22	10	8	7	5	12	10	8	6	13	10	7	7
20	13	10	9	7	15	12	11	8	17	14	10	9
18	18	14	13	9	21	17	15	11	24	19	13	12
16	24	19	17	12	27	22	19	14	32	26	18	16
14	33	26	23	17	42	34	29	21	45	36	25	23
12	45	36	32	23	53	42	37	27	55	44	31	28
10	58	46	41	29	74	59	52	37	75	60	42	38

Standard Housing Data


NPT Housings

NPT Plug (Brass or Stainless Steel)




NPT Thread	Brass Part No.	Stainless Part No.	Area (Sq. In.)	Hex Size	L
1/4" NPT	6096-1-1	9559-2	0.06	0.63"	0.84"
3/8" NPT	13904	9559-4	0.10	0.75"	0.75"
1/2" NPT	9281	9559-7	0.19	0.88"	1.09"
3/4" NPT	13783	9559-10	0.36	1.13"	1.17"
1" NPT	9026	9559-13	0.64	1.38"	1.36"

NPT Nipple (Brass or Stainless Steel)



NPT Thread	Brass Part No.	Stainless Part No.	Area (Sq. In.)	Hex Size	L
1/4" NPT	6098-4-1	6098-4-3	0.06	0.63"	1.45"
3/8" NPT	6098-7-1	6098-7-3	0.10	0.75"	1.45"
1/2" NPT	6098-9-1	6098-9-3	0.19	0.88"	1.89"
3/4" NPT	6098-11-1	6098-11-3	0.36	1.13"	1.97"
1" NPT	6098-12-1	6098-12-3	0.64	1.38"	2.34"


NPT In-Line Adapter Female to Male (Brass or Stainless Steel)

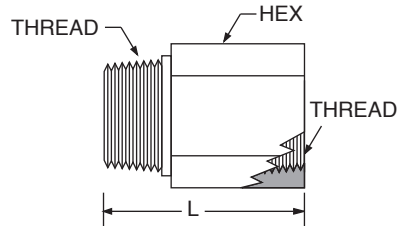

NPT Thread	Brass Part No.	Stainless Part No.	Area (Sq. In.)	Hex Size	L
1/4" NPT	26568-2-1	26568-2-2	0.06	0.75"	1.22"
3/8" NPT	26568-3-1	26568-3-2	0.10	0.88"	1.44"
1/2" NPT	26568-4-1	26568-4-2	0.19	1.12"	1.88"
3/4" NPT	26568-5-1	26568-5-2	0.36	1.38"	1.95"
1" NPT	26568-6-1	26568-6-2	0.63	1.63"	2.20"


"O" Ring Face Seal Housings (Pressure or Vacuum)

SAE Face Seal



Thread Size	Stainless Steel Part No.	Area (Sq. In.)	Hex Size	L
3/4"-16	12271-3	0.22	1.00"	1.19"
1 1/16"-12	12271-6	0.42	1.63"	1.27"

Pressure Face Seal

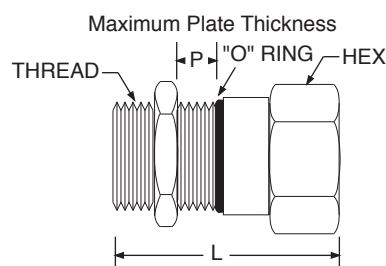


Thread Size	Stainless Steel Part No.	Part No. (Sq. In.)	Hex Size	L	P
3/8"-24	8453-3	0.03	0.62	0.73"	0.16"
1/2"-20	8453-5	0.07	0.88	0.88"	0.13"
3/4"-16	8453-7	0.16	1.13	0.95"	0.16"
1 1/16"-12	8453-8	0.37	1.50	1.19"	0.15"

Standard Housing Data

"O" Ring Face Seal Housing (Pressure or Vacuum, continued)


Face Seal

To NPT
Adapter (Steel)
("Bullet Hub")

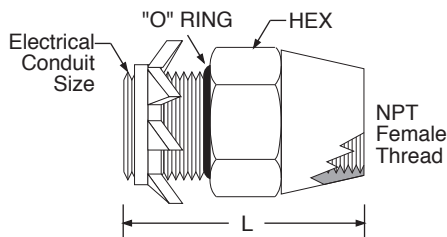

Electrical Conduit Size	Knockout Size	Steel (Zinc Chromate) Part No.	Area (Sq. In.)	Hex Size	L
1/2"	7/8"	26539-1	0.33"	1.38"	1.30"
3/4"	1-3/32"	26539-2	0.63"	1.63"	1.30"
1"	1-11/32"	26539-3	1.02"	2.09"	1.55"


"O" Ring Face Seal Housing (Vacuum Face Seal)

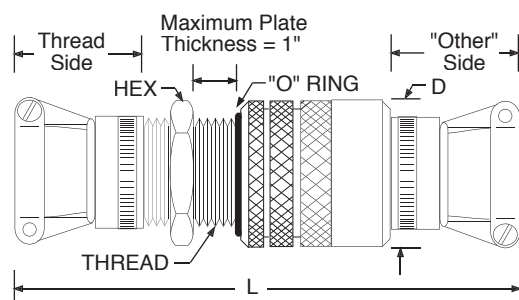

Thread	Stainless Steel Part No.		Area (Sq. In.)	D	Hex Size	L
	w/o clamps	with clamps				
1"-20	12376		0.75	1.63"	1.38"	5.63"
1 1/4"-18	12378		1.00	1.75"	1.63"	6.60"
1 3/4"-18	12384		2.00	2.25"	2.00"	7.07"
2"-20	12380		3.50	2.75"	2.38"	9.10"
2 3/4"-16	12382		5.00	3.50"	3.25"	11.73"

We also offer a very large capacity feedthru housing which clamps onto a vacuum port plate entirely from the outside (eliminates having to spin a jam nut). Please refer to the **Unique Feedthrus** section on Face Mount housings, page 50.


Vacuum Flange Housings

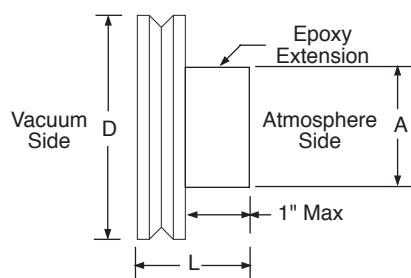

Nominal Size	Part No.	Area (Sq. In.)	D	A	L
1 1/3"	13173	0.30	1.33"	0.75"	0.92"
2 3/4"	40388-1	1.76	2.75"	1.50"	1.50"

We can fabricate a feedthru seal with virtually any flange, limited only by the area available vs. the wire or conductor areas. We welcome your inquiry about providing specialized feedthrus. Vacuum flanges are fabricated of 303 Stainless Steel and are compatible with the Varian® Conflat design.

Radial "O" Ring Housings

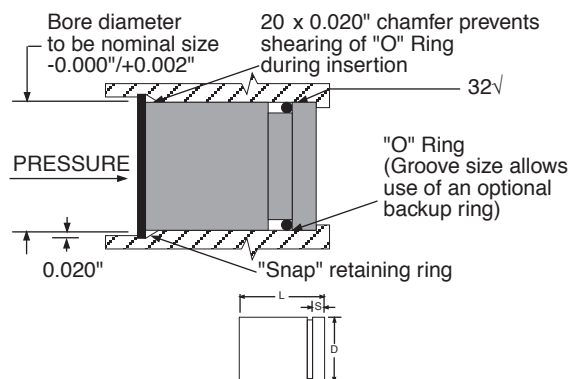

Nominal Size	Part No.	Area (Sq. In.)	D	L	S
1/4"	7458-5	0.004	0.248	0.50	0.13
3/8"	7458-1	0.028	0.373	0.50	0.13
1/2"	7458-2	0.075	0.498	0.75	0.25
3/4"	7458-3	0.196	0.748	1.00	0.25
1"	7458-4	0.385	0.998	1.25	0.50
1 1/4"	7458-7	0.785	1.248	1.75	0.63

Housing is molded of epoxy.

PotCon™ Sealed Connectors

When we conceived this section for PotCon™ Hermetic Connectors, our first priority was to make it a truly useful document for designers... with particular emphasis on a "Single-Page-Lookup" concept of its organization.

Our motivation to do this was our own confusion and frustration with "classic" connector catalog pages. A quick search for a specific connector set soon degenerated into a multi-page and sometimes multi-catalog task.

This catalog section is the result of the "Single-Page-Lookup" challenge. With just one look at the Table of Contents you can identify the page which covers your mounting and connector configuration.

We have then listed on that one page a complete compilation of a wide selection of contact configurations from the three most popular connector series... but in hermetically sealed versions. As an additional benefit, if you need to purchase mating connector sets or mating harness-and-connector assemblies, you can easily specify them from the same page.

Of particular note should be our "In-Line PotCon™ Connector" which allows you to mate your inside and outside cable sets with or without the bulkhead feedthru. This was accomplished by our arrangement of plugs/receptacles and pins/sockets on both sides of the bulkhead to allow the interconnection. Please look at our **PBTR** (page 14) and **RBTP** (page 16) for these features.

In addition to our standard line of hermetic connectors, we have also offered a very comprehensive, complementary

line of our hermetically sealed wire harnesses in some of the other sections. This approach can offer significant technical, cost, and lead time benefits over the classic bulkhead mounted connector. These advantages are particularly great in the case where thermocouple alloys are to be routed through the bulkhead or port.

Requests from our customers for a complete line of high frequency and high voltage hermetic feedthrus for coaxial cable connectors has prompted the expansion of our product line to include bulkhead feedthrus incorporating coaxial cable connectors.

We have also introduced a full line of hermetically sealed fiber optic feedthru connectors in both bulkhead face seal mountings and in vacuum flanges.

For those applications that require ultra clean components, we have introduced a Vacuum Outgassing Service which offers to thoroughly clean components. Please refer to the **Unique Feedthrus** section of this catalog for further information. We have also "packaged" two of the more popular PotCon™ Connectors (37 pins and 128 pins) as "kits" for your ordering convenience.

If you can't find one of our standard PotCon™ Connector products to solve your problem, feel free to call us Toll Free at **1.800.533.8068** for a full discussion of alternates or custom designed feedthrus for your specific application.


Challenge us!

PotCon™ Sealed Connectors

Table of Contents

PotCon™ Sealed Connector Model PBTR (<i>plug/receptacle</i>)	14-15
PotCon™ Sealed Connector Model RBTP (<i>receptacle/plug</i>)	16-17
PotCon™ Sealed Connector Model RBTR (<i>receptacle/receptacle</i>)	18-19
PotCon™ Sealed Connector Model PBTP (<i>plug/plug</i>)	20-21
PotCon™ Sealed Connector Model RBTW (<i>receptacle/wire</i>)	22-23
PotCon™ Sealed Connector Model PBTW (<i>plug/wire</i>)	24-25
Thru-Bulkhead Feedthru Model TBFH (Hermetic)	26-27
PotCon™ "Model 125/37" Hermetic Bulkhead Feedthru Connector	28-29
PotCon™ Connector Model RFW (<i>receptacle/wire</i>)	30-31
PotCon™ Connector Model PFW (<i>plug/wire</i>)	32-33
Mating Connectors and Connector-Harness Assemblies	34
PotCon™ Hermetic Connectors for Fiber Optics and Coaxial Cables	35
Thermocouple Alloy PotCon™ Connectors	36-37
Connector Specifications and Crimp Tooling	38
Alternate Connector Insert Positions	39
Complete Connector Seal Sets: 37 #22 AWG	40
Complete Connector Seal Sets: 128 #22 AWG	41
PotCon™ Hermetic Connectors - Nomenclature	42
PotCon™ Hermetic Connectors - Connector Configurations	43

PotCon™ Connector Model PBTR Plug/Receptacle

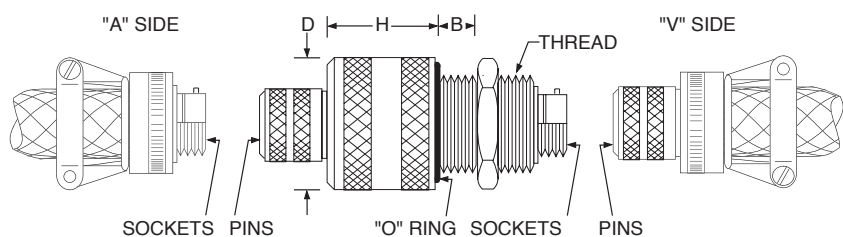

tHsg	Thread	D	B	H
1	1.00"-20	1.63"	1.10"	1.88"
2	1.25"-18	1.75"	1.10"	1.63"
3	1.75"-18	2.25"	1.10"	1.25"
4	2.75"-16	3.50"	1.10"	3.56"

Connectors are available with either **Thread** or **Bayonet** couplings.

Specifications

Connectors and Cable Clamps

Connector Body Material:

Aluminum, Electroless Nickel Plated

Cable Clamp Material:

Aluminum, Electroless Nickel Plated

Hardware Material:

Stainless Steel

Pins and Sockets:

#8 AWG are Silver on Copper

#12 AWG- #22 AWG are Gold on Copper

(See Page 36 for Thermocouple Alloys)

All Connectors Have:

Insert Position N

Elastomeric Interfacial Seals

PotCon™ Seal: Housing and Hardware

Housing and Jam Nut:

300 Series Stainless Steel

"O" Ring:

Nitrile Rubber

Epoxy Sealant:

Low outgassing material (See page 60 for details)

Limits and QC Testing:

Helium leak <5 x 10⁻⁸ cc/sec

Vacuum levels to 1 x 10⁻⁸ mm Hg

Assembly is hipot tested @ connector rating

Temperature Range: -40°F to +250°F (see page 57)

To Order PotCon™ Connectors & Accessories

PotCon™ Connectors, unassembled Mating Connectors, and Mating Harness-and-Connectors are all ordered as separate items.

To order a PotCon™ Hermetic Connector:

Specify the catalog number.

To order an unassembled Mating Connector:

Prefix either an **A** or a **V** (depending on which side you want) to the catalog number of the PotCon™ Connector you selected. Note that you must individually specify both an **A** and a **V** if you want one of each. Contacts are included at no charge. To order a crimp tool for the contacts, see page 38.

To order a Mating Harness-and-Connector:




Prefix either an **A** or a **V** as above, then add as a suffix a dash number which will be the cable harness length in

feet, e.g.: A24012-17 is an **A** side harness-and-connector with 17 feet of cable. Harnesses are provided fully assembled and tagged with the contact ID. Expandable braid of HALAR® will be placed over the **V** side harness, polyester over the **A** side. Wire conforms to MIL-W-16878E/5, 1000V, TEFLON® insulated, silver plated, stranded conductors.

Complete ordering instructions are on the inside back cover of this catalog.

A full line of optional designs and accessories are available for PotCon™ Connectors including hand crimp tooling, thermocouple alloy pins and sockets, alternate housing designs and sizes plus alternate insert arrangements. See the Table of Contents on page 13 for more details.

Catalog No.
Housing size




Connector Type	Standard Circular			Miniature Circular			Scoop Proof Miniature Circular			
Coupling	Threaded			Bayonet			Bayonet			
MIL Spec	MIL-C-5015 MIL-C-83723 Series II			MIL-C-83723 Series I MIL-C-26482 Series 2			MIL-C-38999 Series I			
MS No. Plug	MS 3456			MS 3476			MS 27467			
MS No. Receptacle	MS 3451			MS 3471			MS 27466			
Amps/Contact	46	23	13	23	13	7.5	23	13	7.5	5
Test Voltage@Sea Level	2000	2000	1000	1500	1500	1500	1800	1800	1800	1300
Test Voltage@Altitude	N/A	N/A	N/A	375	375	375	200	200	200	200
AWG of Contacts	8	12	16	12	16	20	12	16	20	22

[illegible]

PotCon™ Connector Model RBTP

Receptacle Plug

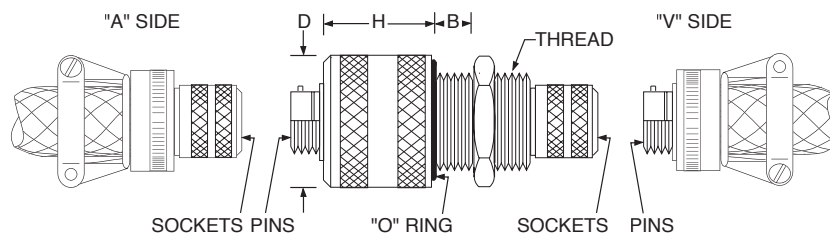

Hsg	Thread	D	B	H
1	1.00"-20	1.63"	1.10"	1.88"
2	1.25"-18	1.75"	1.10"	1.63"
3	1.75"-18	2.25"	1.10"	1.25"
4	2.75"-16	3.50"	1.10"	3.56"

Connectors are available with either **Thread** or **Bayonet** couplings.

Specifications

Connectors and Cable Clamps

Connector Body Material:

Aluminum, Electroless Nickel Plated

Cable Clamp Material:

Aluminum, Electroless Nickel Plated

Hardware Material:

Stainless Steel

Pins and Sockets:

#8 AWG are Silver on copper

#12 AWG- #22 AWG are Gold on Copper

(See Page 36 for Thermocouple Alloys)

All Connectors Have:

Insert Position N

Elastomeric Interfacial Seals

PotCon™ Seal: Housing and Hardware

Housing and Jam Nut:

300 Series stainless Steel

"O" Ring:

Nitrile Rubber

Epoxy Sealant:

Low outgassing material (See page 60 for details)

Limits and QC Testing:

Helium leak $<5 \times 10^{-8}$ cc/sec

Vacuum levels to 1×10^{-8} mm Hg

Assembly is hipot tested @ connector rating

Temperature Range: -40°F to +250°F (see page 57)

To Order PotCon™ Connectors & Accessories

PotCon™ Connectors, unassembled Mating Connectors, and Mating Harness-and-Connectors are all ordered as separate items.

To order a PotCon™ Hermetic Connector:

Specify the catalog number.

To order an unassembled Mating Connector:

Prefix either an **A** or a **V** (depending on which side you want) to the catalog number of the PotCon™ Connector you selected. Note that you must individually specify both an **A** and a **V** if you want one of each. Contacts are included at no charge. To order a crimp tool for the contacts, see page 38.

To order a Mating Harness-and-Connector:




Prefix either an **A** or a **V** as above, then add as a suffix a dash number which will be the cable harness length in

feet, e.g.: A24112-17 is an **A** side harness-and-connector with 17 feet of cable. Harnesses are provided fully assembled and tagged with the contact ID. Expandable braid of HALAR® will be placed over the **V** side harness, polyester over the **A** side. Wire conforms to MIL-W-16878E/5, 1000V, TEFLON® insulated, silver plated, stranded conductors.

Complete ordering instructions are on the inside back cover of this catalog.

A full line of optional designs and accessories are available for PotCon™ Connectors including hand crimp tooling, thermocouple alloy pins and sockets, alternate housing designs and sizes plus alternate insert arrangements. See the Table of Contents on page 13 for more details.

Catalog No.
Housing size




Connector Type	Standard Circular			Miniature Circular			Scoop Proof Miniature Circular			
Coupling	Threaded			Bayonet			Bayonet			
MIL Spec	MIL-C-5015 MIL-C-83723 Series II			MIL-C-83723 Series I MIL-C-26482 Series 2			MIL-C-38999 Series I			
MS No. Plug	MS 3456			MS 3476			MS 27467			
MS No. Receptacle	MS 3451			MS 3471			MS 27466			
Amps/Contact	46	23	13	23	13	7.5	23	13	7.5	5
Test Voltage@Sea Level	2000	2000	1000	1500	1500	1500	1800	1800	1800	1300
Test Voltage@Altitude	N/A	N/A	N/A	375	375	375	200	200	200	200
AWG of Contacts	8	12	16	12	16	20	12	16	20	22

[illegible]

PotCon™ Connector Model RBTR

Receptacle/Receptacle

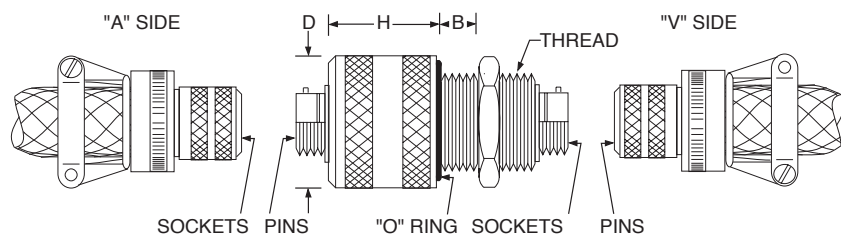

Hsg	Thread	D	B	H
1	1.00"-20	1.63"	1.10"	1.88"
2	1.25"-18	1.75"	1.10"	1.63"
3	1.75"-18	2.25"	1.10"	1.25"
4	2.75"-16	3.50"	1.10"	3.56"

Connectors are available with either **Thread** or **Bayonet** couplings.

Specifications

Connectors and Cable Clamps

Connector Body Material:

Aluminum, Electroless Nickel Plated

Cable Clamp Material:

Aluminum, Electroless Nickel Plated

Hardware Material:

Stainless Steel

Pins and Sockets:

#8 AWG are Silver on Copper

#12 AWG- #22 AWG are Gold on Copper

(See Page 36 for Thermocouple Alloys)

All Connectors Have:

Insert Position N

Elastomeric Interfacial Seals

PotCon™ Seal: Housing and Hardware

Housing and Jam Nut:

300 Series stainless Steel

"O" Ring:

Nitrile Rubber

Epoxy Sealant:

Low outgassing material (See page 60 for details)

Limits and QC Testing:

Helium leak $<5 \times 10^{-8}$ cc/sec

Vacuum levels to 1×10^{-8} mm Hg

Assembly is hipot tested @ connector rating

Temperature Range: -40°F to +250°F (see page 57)

To Order PotCon™ Connectors & Accessories

PotCon™ Connectors, unassembled Mating Connectors, and Mating Harness-and-Connectors are all ordered as separate items.

To order a PotCon™ Hermetic Connector:

Specify the catalog number.

To order an unassembled Mating Connector:

Prefix either an **A** or a **V** (depending on which side you want) to the catalog number of the PotCon™ Connector you selected. Note that you must individually specify both an **A** and a **V** if you want one of each. Contacts are included at no charge. To order a crimp tool for the contacts, see page 38.

To order a Mating Harness-and-Connector:




Prefix either an **A** or a **V** as above, then add as a suffix a dash number which will be the cable harness length in

feet, e.g.: A24212-17 is an **A** side harness-and-connector with 17 feet of cable. Harnesses are provided fully assembled and tagged with the contact ID. Expandable braid of HALAR® will be placed over the **V** side harness, polyester over the **A** side. Wire conforms to MIL-W-16878E/5, 1000V, TEFLON® insulated, silver plated, stranded conductors.

Complete ordering instructions are on the inside back cover of this catalog.

A full line of optional designs and accessories are available for PotCon™ Connectors including hand crimp tooling, thermocouple alloy pins and sockets, alternate housing designs and sizes plus alternate insert arrangements. See the Table of Contents on page 13 for more details.


Catalog No.
Housing size



Connector Type	Standard Circular			Miniature Circular			Scoop Proof Miniature Circular			
Coupling	Threaded			Bayonet			Bayonet			
MIL Spec	MIL-C-5015 MIL-C-83723 Series II			MIL-C-83723 Series I MIL-C-26482 Series 2			MIL-C-38999 Series I			
MS No. Plug	MS 3456			MS 3476			MS 27467			
MS No. Receptacle	MS 3451			MS 3471			MS 27466			
Amps/Contact	46	23	13	23	13	7.5	23	13	7.5	5
Test Voltage@Sea Level	2000	2000	1000	1500	1500	1500	1800	1800	1800	1300
Test Voltage@Altitude	N/A	N/A	N/A	375	375	375	200	200	200	200
AWG of Contacts	8	12	16	12	16	20	12	16	20	22

[illegible]

PotCon™ Connector Model PBTP Plug/Plug

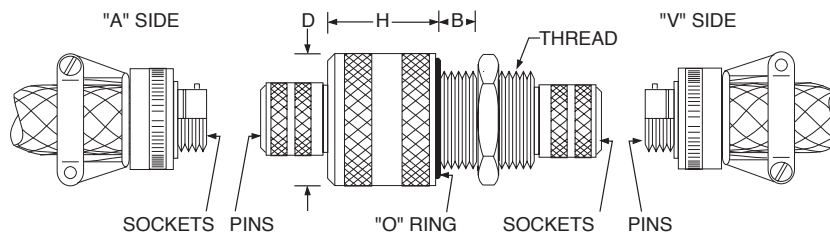

Hsg	Thread	D	B	H
1	1.00"-20	1.63"	1.10"	1.88"
2	1.25"-18	1.75"	1.10"	1.63"
3	1.75"-18	2.25"	1.10"	1.25"
4	2.75"-16	3.50"	1.10"	3.56"

Connectors are available with either **Thread** or **Bayonet** couplings.

Specifications

Connectors and Cable Clamps

Connector Body Material:

Aluminum, Electroless Nickel Plated

Cable Clamp Material:

Aluminum, Electroless Nickel Plated

Hardware Material:

Stainless Steel

Pins and Sockets:

#8 AWG are Silver on Copper

#12 AWG- #22 AWG are Gold on Copper

(See Page 36 for Thermocouple Alloys)

All Connectors Have:

Insert Position N

Elastomeric Interfacial Seals

PotCon™ Seal: Housing and Hardware

Housing and Jam Nut:

300 Series stainless Steel

"O" Ring:

Nitrile Rubber

Epoxy Sealant:

Low outgassing material (See page 60 for details)

Limits and QC Testing:

Helium leak $<5 \times 10^{-8}$ cc/sec

Vacuum levels to 1×10^{-8} mm Hg

Assembly is hipot tested @ connector rating

Temperature Range: -40°F to +250°F (see page 57)

To Order PotCon™ Connectors & Accessories

PotCon™ Connectors, unassembled Mating Connectors, and Mating Harness-and-Connectors are all ordered as separate items.

To order a PotCon™ Hermetic Connector:

Specify the catalog number.

To order an unassembled Mating Connector:

Prefix either an **A** or a **V** (depending on which side you want) to the catalog number of the PotCon™ Connector you selected. Note that you must individually specify both an **A** and a **V** if you want one of each. Contacts are included at no charge. To order a crimp tool for the contacts, see page 38.

To order a Mating Harness-and-Connector:

Prefix either an **A** or a **V** as above, then add as a suffix a dash number which will be the cable harness length in




feet, e.g.: A24612-17 is an **A** side harness-and-connector with 17 feet of cable. Harnesses are provided fully assembled and tagged with the contact ID. Expandable braid of HALAR® will be placed over the **V** side harness, polyester over the **A** side. Wire conforms to MIL-W-16878E/5, 1000V, TEFLON® insulated, silver plated, stranded conductors.

Complete ordering instructions are on the inside back cover of this catalog.

A full line of optional designs and accessories are available for PotCon™ Connectors including hand crimp tooling, thermocouple alloy pins and sockets, alternate housing designs and sizes plus alternate insert arrangements. See the Table of Contents on page 13 for more details.

PBTP


Catalog No.
Housing size



Connector Type	Standard Circular			Miniature Circular			Scoop Proof Miniature Circular			
Coupling	Threaded			Bayonet			Bayonet			
MIL Spec	MIL-C-5015 MIL-C-83723 Series II			MIL-C-83723 Series I MIL-C-26482 Series 2			MIL-C-38999 Series I			
MS No. Plug	MS 3456			MS 3476			MS 27467			
MS No. Receptacle	MS 3451			MS 3471			MS 27466			
Amps/Contact	46	23	13	23	13	7.5	23	13	7.5	5
Test Voltage@Sea Level	2000	2000	1000	1500	1500	1500	1800	1800	1800	1300
Test Voltage@Altitude	N/A	N/A	N/A	375	375	375	200	200	200	200
AWG of Contacts	8	12	16	12	16	20	12	16	20	22

[illegible]

PotCon™ Connector Model RBTW Receptacle/Wire

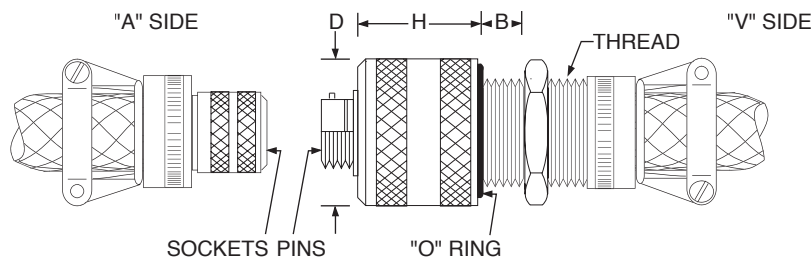

Hsg	Thread	D	B	H
1	1.00"-20	1.63"	1.10"	1.88"
2	1.25"-18	1.75"	1.10"	1.63"
3	1.75"-18	2.25"	1.10"	1.25"
4	2.75"-16	3.50"	1.10"	3.56"

Connectors are available with either **Thread** or **Bayonet** couplings.

Specifications

Connectors and Cable Clamps

Connector Body Material:

Aluminum, Electroless Nickel Plated

Cable Clamp Material:

Aluminum, Electroless Nickel Plated

Hardware Material:

Stainless Steel

Pins and Sockets:

#8 AWG are Silver on Copper

#12 AWG- #22 AWG are Gold on Copper

(See Page 36 for Thermocouple Alloys)

All Connectors Have:

Insert Position N

PotCon™ Seal: Housing and Hardware

Housing and Jam Nut:

300 Series stainless Steel

"O" Ring:

Nitrile Rubber

Epoxy Sealant:

Low outgassing material (See page 60 for details)

Wire Harness:

Indicated AWG, Teflon® insulation to MIL-W-16878E/5

1000V, expandable braid on V side is Halar®

Limits and QC Testing:

Helium leak <5x10⁻⁸ cc/sec

Vacuum levels to 1 x 10⁻⁶ mm Hg

Assembly is hipot tested @ connector rating

Temperature Range: -40°F to +250°F (see page 57)

To Order PotCon™ Connectors & Accessories

PotCon™ Connectors, unassembled Mating Connectors, and Mating Harness-and-Connectors are all ordered as separate items.

To order a PotCon™ Hermetic Connector:

Specify the catalog number number and add as a suffix a dash number, the length of the V side wire harness in feet, e.g.: a 24412-23 would be a 24412 PotCon™ with a 23 foot long V side harness of 7 #16 AWG wires.

To order an unassembled Mating Connector:

Prefix an A to the catalog number of the PotCon™ Connector you selected. Contacts are included at no charge. To order a crimp tool for the contacts, see page 38.

To order a Mating Harness-and-Connector:




Prefix either an A as above, then add as a suffix a dash number which will be the cable harness length in feet, e.g.: A24412-17 is an A side harness-and-connector with 17 feet of cable. Harnesses are provided fully assembled and tagged with the contact ID. Expandable braid of polyester will be placed over the A side harness. Wire conforms to MIL-W-16878E/5, 1000V, TEFLON® insulated, silver plated, stranded conductors.

Complete ordering instructions are on the inside back cover of this catalog.

A full line of optional designs and accessories are available for PotCon™ Connectors including hand crimp tooling, thermocouple alloy pins and sockets, alternate housing designs and sizes plus alternate insert arrangements. See the Table of Contents on page 13 for more details.


RBTW

Catalog No.
Housing size

[illegible]

PotCon™ Connector Model PBTW

Plug/Wire

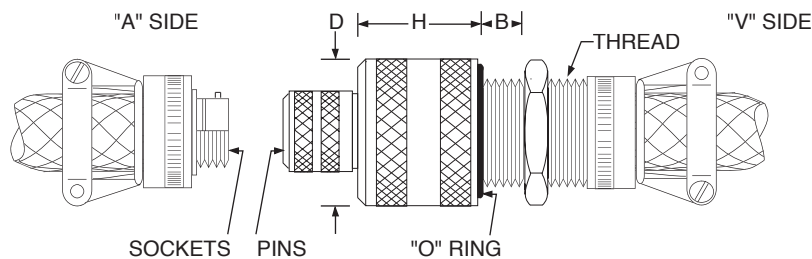

Hsg	Thread	D	B	H
1	1.00"-20	1.63"	1.10"	1.88"
2	1.25"-18	1.75"	1.10"	1.63"
3	1.75"-18	2.25"	1.10"	1.25"
4	2.75"-16	3.50"	1.10"	3.56"

Connectors are available with either **Thread** or **Bayonet** couplings.

Specifications

Connectors and Cable Clamps

Connector Body Material:

Aluminum, Electroless Nickel Plated

Cable Clamp Material:

Aluminum, Electroless Nickel Plated

Hardware Material:

Stainless Steel

Pins and Sockets:

#8 AWG are Silver on Copper

#12 AWG- #22 AWG are Gold on Copper

(See Page 36 for Thermocouple Alloys)

All Connectors Have:

Insert Position N

Elastomeric Interfacial Seals

PotCon™ Seal: Housing and Hardware

Housing and Jam Nut:

300 Series stainless Steel

"O" Ring:

Nitrile Rubber

Epoxy Sealant:

Low outgassing material (See page 60 for details)

Wire Harness:

Of indicated AWG, Teflon® insulation to MIL-W-16878E/5 1000V, expandable braid on V side is of Halar®

Limits and QC Testing:

Helium leak <5x10⁻⁸ cc/sec

Vacuum levels to 1 x 10⁻⁸ mm Hg

Assembly is hipot tested @ connector rating

Temperature Range: -40°F to +250°F (see page 57)

To Order PotCon™ Connectors & Accessories

PotCon™ Connectors, unassembled Mating Connectors, and Mating Harness-and-Connectors are all ordered as separate items.

To order a PotCon™ Hermetic Connector:

Specify the catalog number and add as a suffix a dash number, the length of the V side wire harness in feet, e.g: a 24512-23 would be a 24512 PotCon™ with a 23 foot long V side harness of 7 #16 AWG wires.

To order an unassembled Mating Connector:

Prefix an A to the catalog number of the PotCon™ Connector you selected. Contacts are included at no charge. To order a crimp tool for the contacts, see page 38.




To order a Mating Harness-and-Connector:

Prefix either an A as above, then add as a suffix a dash number which will be the cable harness length in feet, e.g.: A24512-17 is an A side harness-and-connector with 17 feet of cable. Harnesses are provided fully assembled and tagged with the contact ID. Expandable braid of polyester will be placed over the A side harness. Wire conforms to MIL-W-16878E/5, 1000V, TEFLON® insulated, silver plated, stranded conductors.

Complete ordering instructions are on the inside back cover of this catalog.

A full line of optional designs and accessories are available for PotCon™ Connectors including hand crimp tooling, thermocouple alloy pins and sockets, alternate housing designs and sizes plus alternate insert arrangements. See the Table of Contents on page 13 for more details.


Catalog No.
Housing size



Connector Type	Standard Circular			Miniature Circular			Scoop Proof Miniature Circular			
Coupling	Threaded			Bayonet			Bayonet			
MIL Spec	MIL-C-5015 MIL-C-83723 Series II			MIL-C-83723 Series I MIL-C-26482 Series 2			MIL-C-38999 Series I			
MS No. Plug	MS 3456			MS 3476			MS 27467			
MS No. Receptacle	MS 3451			MS 3471			MS 27466			
Amps/Contact	46	23	13	23	13	7.5	23	13	7.5	5
Test Voltage@Sea Level	2000	2000	1000	1500	1500	1500	1800	1800	1800	1300
Test Voltage@Altitude	N/A	N/A	N/A	375	375	375	200	200	200	200
AWG of Contacts	8	12	16	12	16	20	12	16	20	22

[illegible]

TBFH Thru-Bulkhead Feedthru

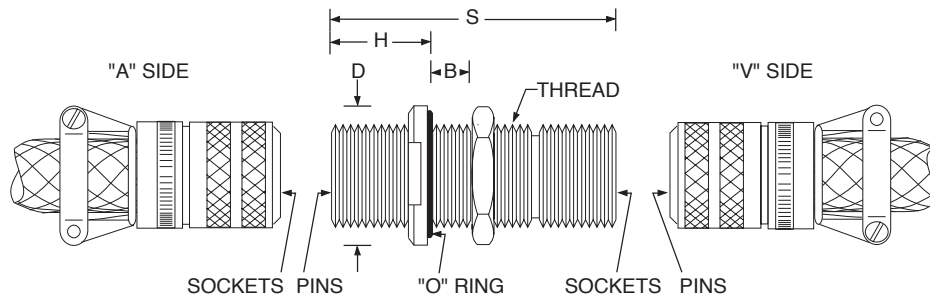

Note: These connectors are fully intermatable with MIL-C-5015 Series Connectors.

Specifications

Materials & Construction

Connector Bodies & Jam Nut:

Aluminum, Electroless Nickel Plated

Housing:

Aluminum

Pins and Sockets:

#8 AWG are Silver on Copper

#12 AWG and #16 AWG are Gold on Copper

(See Page 36 for Thermocouple Alloys)

All Connectors Have:

Insert Position N

"O" Ring:

Nitrile Rubber

Epoxy Sealant:

Low outgassing material (See page 60 for details)

Limits and QC Testing:

Helium leak $<5 \times 10^{-8}$ cc/sec

Vacuum levels to 1×10^{-6} mm Hg

#8 AWG is hipot tested @ 1000VAC

#12 AWG and #16 AWG at 600VAC

Temperature Range: -40°F to +250°F (see page 57)

To Order PotCon™ Connectors & Accessories

PotCon™ Connectors, unassembled Mating Connectors, and Mating Harness-and-Connectors are all ordered as separate items.

To order a PotCon Hermetic Connector:

Specify the catalog number.

To order an unassembled Mating Connector:

Prefix either an **A** or a **V** (depending on which side you want) to the catalog number of the PotCon™ Connector you selected. Note that you must individually specify both an **A** and a **V** if you want one of each. Contacts are included at no charge. To order a crimp tool for the contacts, see page 38.

To order a Mating Harness-and-Connector:

Prefix either an **A** or a **V** as above, then add as a suffix a dash number which will be the cable harness length in feet, e.g.: A25212-17 is an **A** side harness-and-connector

with 17 feet of cable. Harnesses are provided fully assembled and tagged with the contact ID. Expandable braid of HALAR® will be placed over the **V** side harness, polyester over the **A** side. Wire conforms to MIL-W-16878E/5, 1000V, TEFLON® insulated, silver plated, stranded conductors.

Complete ordering instructions are on the inside back cover of this catalog.

A full line of optional designs and accessories are available for PotCon™ Connectors including hand crimp tooling, thermocouple alloy pins and sockets, alternate housing designs and sizes plus alternate insert arrangements. See the Table of Contents on page 13 for more details.

Reference Charts

Contact AWG		8	12	16
Number of Contacts	3	25200 Hsg 5	25203 Hsg 2	25207 Hsg 1
	4	25201 Hsg 5	25204 Hsg 3	25208 Hsg 3
	5	--	25205 Hsg 3	25209 Hsg 2
	7	24202 Hsg 6	24206 Hsg 4	24210 Hsg 2
	14	--	--	25211 Hsg 4
	17	--	--	25212 Hsg 4
	19	--	--	25213 Hsg 5
	26	--	--	25214 Hsg 7
	37	--	--	25215 Hsg 7
	48	--	--	25216 Hsg 8

Cross Reference Chart ITT Cannon to PotCon™	
14-7	25207
16-1	25210
16-8	25209
16-10	25203
18-04	25208
18-10	25204
18-11	25205
20-15	25206
20-27	25211
20-29	25212
22-02	25200
22-14	25213
22-22	25201
24-10	25202
28-12	25214
28-21	25215

Alternate Insert Arrangements	
PotCon™ Catalog#	Arrangements
25200	NWXYZ
25201	NXY
25202	NWZ
25203	NWXY
25204	NXY
25205	NXY
25206	NWZ
25207	NWXY
25208	NWXYZ
25209	NXY
25210	NWZ
25211	NWXYZ
25212	NWZ
25213	NWZ
25214	NWXY
25215	NWXYZ
25216	NWXYZ

Dimensions of Housings on Page 26

Housing	Shell Size	Thread	B (Max)	D	H (Max)	S (Max)
1	14	.878-20	3.75	1.447	.921	2.859
2	16	1.000-20	3.75	1.572	1.135	2.859
3	18	1.125-18	.750	1.697	1.135	2.859
4	20	1.250-18	.750	1.822	1.135	2.859
5	22	1.375-18	.750	1.947	1.135	2.859
6	24	1.500-18	.750	2.072	1.135	2.859
7	28	1.750-18	.750	2.322	1.135	2.859
8	36	2.250-18	.750	2.822	1.135	2.859

PotCon™ Model "125/37"

Hermetic Bulkhead Feedthru Connectors

Specifications

Dielectric Withstand:

2000 VAC Sea Level
1250 VAC 50,000 ft.
900 Vac 110,000 ft.

Insulation Resistance:

5000 meg Ω Minimum per MIL-C-26482

Hermetic Seal


Vacuum: $<5 \times 10^{-8}$ std cc/sec

Pressure: 1000 psi

Materials

Body & Nut:

303 Series Stainless Steel

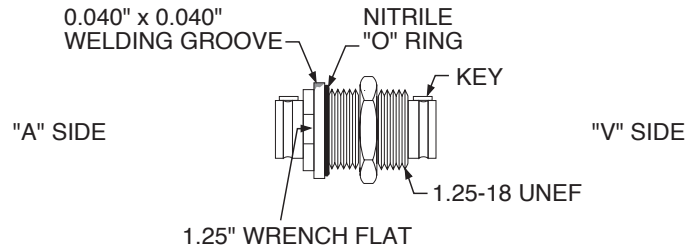


Casting Material:

Epoxy with extremely low outgassing characteristics; $<0.2\%$ weight loss and 0.002% VCM; 25°C condensing surface, 125°C sample temperature; $<1 \times 10^{-6}$ mm Hg Vacuum


"O" Ring: Nitrile Rubber

Equivalent Part No.	PotCon™ Part No.	Pin Size	Number of Pins	Ampacity (Amperes)	Pin Material	Notes
DM5623-37PP	12474	20	37	7.5	Copper	
DM5623-37-40PP	12475	20	37	N/A	ISA Type E	Odd pins are Chromel, even are Constantan
DM5623-37-39PP	12476	20	37	N/A	ISA Type J	Odd pins are Iron, even are Constantan
DM5623-37-38PP	12477	20	37	N/A	ISA Type K	Odd pins are Chromel, even are Alumel
DM5623-37-37PP	12478	20	37	N/A	ISA Type T	Odd pins are Copper, even are Constantan
DM5623-37-2PP	12479	16	24	N/A	Copper	
DM5623-37-23PP	12480	12	12	N/A	Copper	
	48906	22	91	N/A	Copper	


Pin Layouts (viewed from atmosphere end)



37 #20 AWG



24 #16 AWG



12 #12 AWG


To order PotCon™ Connector Model "125/37" Hermetic Bulkhead Feedthru

Specify the Part Number of the Conductor. **We do not offer mating partners for this product.** For the "fit and

function" equivalent to a connected and assembled "125/37" Harness, see page 29.

PotCon™ Model "125/37" Cable Equivalents

Sealed Wire Harness Feedthrus

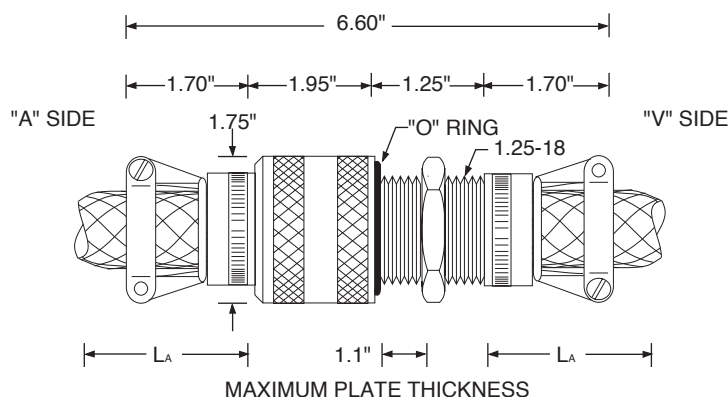

Specifications

Housing and Cable Clamps

Body Material:

300 Series Stainless Steel

Cable Clamp Material:

Aluminum, Electroless Nickel Plated

Hardware Material:

Stainless Steel

Epoxy Sealant:

Low outgassing material (See page 60 for details).

"O" Ring:

Nitrile Rubber

Wires:

See page 36 for Thermocouple Alloys. Wire harnesses are covered with expandable braid of polyester on the **A** side and of **Halar®** on the **V** side. Wires are tagged. Wires may be skinned 0.25 inches on one end for testing.

Limits and QC Testing:

Helium leak $<5 \times 10^{-8}$ cc/sec

Vacuum levels to 1×10^{-8} mm Hg

Assembly is hipot tested at 100VAC for thermocouples, 1000VAC for others

Temperature Range: -40°F to +250°F, may be baked-out to +250°F (see page 57)

Catalog Number	Wire Complement	Ampacity (Amperes)	Wire and Insulation	PotCon™ "125/37" Equivalent (See page 28)
13896-L _A -L _V	37 # 20 AWG Wires	7.5a	Mil-W-16878E/5 Teflon®, 1000V, 19x	12474
13897-L _A -L _V	20 Duplex Pairs of ISA Type E, #20 AWG	N/A	Teflon® Insulation ISA Color Codes	12475
26787-L _A -L _V	20 Duplex Pairs of ISA Type J, #20 AWG	N/A	Teflon® Insulation ISA Color Codes	12476
26788-L _A -L _V	20 Duplex Pairs of ISA Type K, #20 AWG	N/A	Teflon® Insulation ISA Color Codes	12477
13898-L _A -L _V	20 Duplex Pairs of ISA Type T, #20 AWG	N/A	Teflon® Insulation ISA Color Codes	12478
13899-L _A -L _V	24 #16 AWG Wires	25a	Mil-W-16878E/5 Teflon®, 1000V, 19x	12479
13901-L _A -L _V	12 #12 AWG Wires	40a	Mil-W-16878E/5 Teflon®, 1000V, 19x	12480


To Order Harness Feedthrus:

Wire Harness Feedthrus are specified by the catalog number followed by two dash numbers. The dash numbers are cable lengths (in feet) expressed as follows: First dash number is **L_A**, the **A** side length and the second dash is **L_V**,

the **V** side length. For example a 13898-17-28 is a catalog number 13898 containing 20 duplex pairs of #20 AWG ISA Type T thermocouple wire 17 feet long on the **A** side and 28 feet long in the **V** side.

PotCon™ Connector Model RFW

Receptacle/Wire

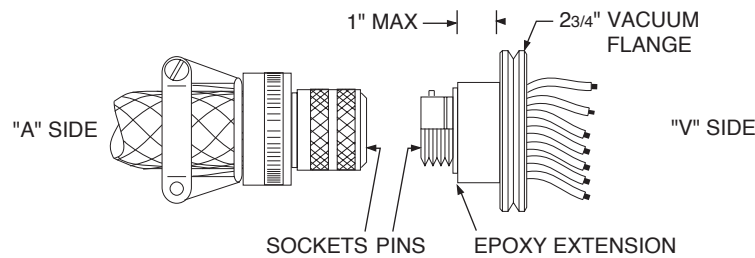

Specifications

Connectors and Cable Clamps

Connector Body Material:

Aluminum, Electroless Nickel Plated

Cable Clamp Material:

Aluminum, Electroless Nickel Plated

Hardware Material:

Stainless Steel

Pins and Sockets:

#8 AWG are Silver on Copper

#12 AWG- #22 AWG are Gold on Copper

(See Page 36 for Thermocouple Alloys)

All Connectors Have:

Insert Position N

Elastomeric Interfacial Seals

PotCon™ Seal: Flange and Hardware

Flange:

300 Series Stainless Steel, Knife Edge Design

Epoxy Sealant:

Low outgassing material (See page 60 for details)

Limits and QC Testing:

Helium leak $<5 \times 10^{-8}$ cc/sec

Vacuum levels to 1×10^{-8} mm Hg

Assembly is hipot tested @ connector rating

Temperature Range: -40°F to +250°F (see page 57)

To Order PotCon™ Connectors & Accessories

PotCon™ Connectors, unassembled Mating Connectors, and Mating Harness-and-Connectors are all ordered as separate items.

To order a PotCon™ Hermetic Connector:

Specify the catalog number and add as a suffix a dash number, the length of the **V** side wire harness in feet. There is no cable jacket sleeve on the **V** side harness.

To order an unassembled Mating Connector:

Prefix an **A** to the catalog number (use the number only) of the PotCon™ Connector you selected. Contacts are included at no charge. To order a crimp tool for the contacts, see page 38.




To order a Mating Harness-and-Connector:

Prefix an **A** to the catalog number (use the number only) as above, then add as a suffix a dash number which will be

the mating cable harness length in feet, e.g.: A24712-17 is an **A** side harness-and-connector with 17 feet of cable. Harnesses are provided fully assembled and jacketed with polyester expandable sleeving. Wire conforms to MIL-W-16878E/5, 1000V, TEFLON® insulated, silver plated, stranded conductors.

Complete ordering instructions are on the inside back cover of this catalog.


A full line of optional designs and accessories are available for PotCon™ Connectors including hand crimp tooling, thermocouple alloy pins and sockets, alternate housing designs and sizes plus alternate insert arrangements. See the Table of Contents on page 13 for more details.

RFW Catalog No.										
Connector Type	Standard Circular			Miniature Circular			Scoop Proof Miniature Circular			
Coupling	Threaded			Bayonet			Bayonet			
MIL Spec	MIL-C-5015 MIL-C-83723 Series II			MIL-C-83723 Series I MIL-C-26482 Series 2			MIL-C-38999 Series I			
MS No. Plug	MS 3456			MS 3476			MS 27467			
MS No. Receptacle	MS 3451			MS 3471			MS 27466			
Amps/Contact	46	23	13	23	13	7.5	23	13	7.5	5
Test Voltage@Sea Level	2000	2000	1000	1500	1500	1500	1800	1800	1800	1300
Test Voltage@Altitude	N/A	N/A	N/A	375	375	375	200	200	200	200
AWG of Contacts	8	12	16	12	16	20	12	16	20	22

[illegible]

PotCon™ Connector Model PFW

Plug/Wire

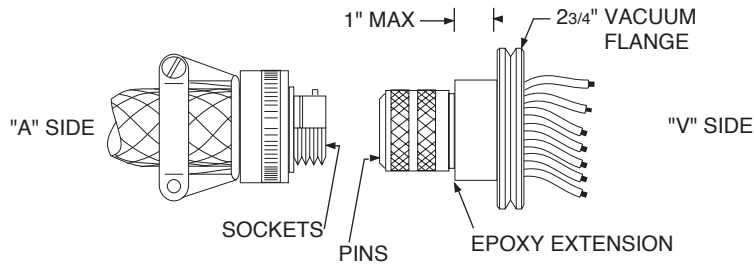

Specifications

Connectors and Cable Clamps

Connector Body Material:

Aluminum, Electroless Nickel Plated

Cable Clamp Material:

Aluminum, Electroless Nickel Plated

Hardware Material:

Stainless Steel

Pins and Sockets:

#8 AWG are Silver on Copper

#12 AWG- #22 AWG are Gold on Copper

(See Page 36 for Thermocouple Alloys)

All Connectors Have:

Insert Position N

Elastomeric Interfacial Seals

PotCon™ Seal: Flange and Hardware

Flange:

300 Series Stainless Steel, Knife Edge Design

Epoxy Sealant:

Low outgassing material (See page 60 for details)

Limits and QC Testing:

Helium leak <5x10⁻⁸ cc/sec

Vacuum levels to 1x10⁻⁸ mm Hg

Assembly is hipot tested @ connector rating

Temperature Range: -40°F to +250°F (see page 57)

To Order PotCon™ Connectors & Accessories

PotCon™ Connectors, unassembled Mating Connectors, and Mating Harness-and-Connectors are all ordered as separate items.

To order a PotCon™ Hermetic Connector:

Specify the catalog number and add as a suffix a dash number, the length of the **V** side wire harness in feet.

There is no cable jacket sleeve on the **V** side harness.

To order an unassembled Mating Connector:

Prefix an **A** to the catalog number of the PotCon™ Connector you selected. Contacts are included at no charge. To order a crimp tool for the contacts, see page 38.

To order a Mating Harness-and-Connector:

Prefix an **A** to the catalog number (use the number only) as above, then add as a suffix a dash number which will be

the mating cable harness length in feet, e.g.: A24812-17 is an **A** side harness-and-connector with 17 feet of cable. Harnesses are provided fully assembled and jacketed with polyester expandable sleeving. Wire conforms to MIL-W-16878E/5, 1000V, TEFLON® insulated, silver plated, stranded conductors.

Complete ordering instructions are on the inside back cover of this catalog.

A full line of optional designs and accessories are available for PotCon™ Connectors including hand crimp tooling, thermocouple alloy pins and sockets, alternate housing designs and sizes plus alternate insert arrangements. See the Table of Contents on page 13 for more details.

[illegible]

Mating Connectors and Connector-Harness Assemblies


The connector-only or connector-and-harness assembly for either side of a feedthru is specified individually. The specification is based upon the feedthru catalog number which you should have already selected. (Examples below also apply to Flange Mounted Feedthrus.)

Unassembled Mating Connector:

To specify an unassembled Mating Connector for one of the feedthru sides, prefix the letter **A** or **V** to the feedthru catalog number.

For example, you have selected Feedthru Catalog No. 24432-5 and want to order the **A** side unassembled mating plug only. The catalog number of the mating connector shown at right (**A** side) is A24432.

Or, another example

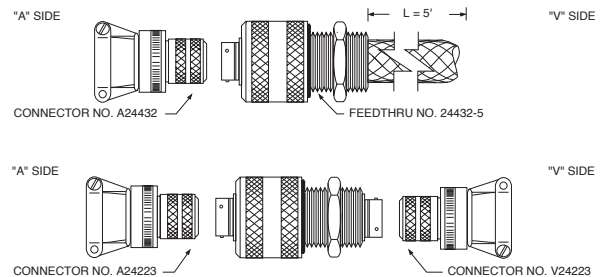


Mating Connector-And-Harness Assemblies:

To specify a connector-and-harness assembly for either side, prefix the letter **A** or **V** to the feedthru catalog number and add as a dash number the length (L) in feet of the assembly.

For example, you have selected Feedthru Catalog No. 24432-5 and want to order the mating Connector-and-Harness assembly which you want to be 23 feet long.

Or, another example

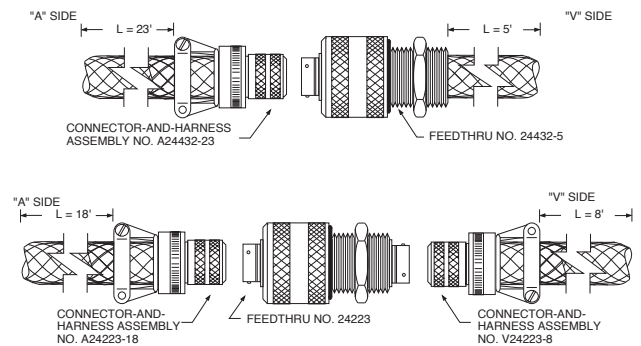

General Specifications:

(For unassembled Mating Connectors and Connector-and-Harnesses)

All connectors-only are provided complete with pins or sockets and insertion/extraction tool. Connectors are aluminum with electroless nickel plating. Strain relief back shell is also aluminum with electroless nickel. Screws are stainless steel. Please see page 39 for alternate insert arrangements. For crimp tooling see page 38.

All connector-and-harness assemblies are provided fully assembled and tested at rated component voltage. Ends may be skinned and tinned 0.25". Harness wire ends will be tagged with connector contact number. Wires have silver

plated, stranded conductors with 1000V Teflon® insulation (MIL-W-16878E/5). All **A** side harnesses are sleeved with expandable polyester braid. **V** side harnesses on Face Seal models will be covered with Halar® expandable braid. **V** side harnesses on Vacuum Flange Models are not sleeved.

Specials:

We can provide a mate/harness to virtually any customer requirement using other wires/stranding/plating/insulation, etc. Contact us for details.

PotCon™ Hermetic Connectors for Fiber Optics and Coaxial Cables

Specifications

PotCon™ Face Seal Housing

Housing and Jam Nut:

300 Series Stainless Steel. See page 11 for dimensions.



Epoxy Sealant:

Low outgassing material (See page 60 for details)

PotCon™ Vacuum Flange

Flange:

300 Series Stainless Steel. See page 11 for dimensions.



Limits and QC Testing:

Helium leak $<5 \times 10^{-8}$ cc/sec

Vacuum levels to 1×10^{-8} mm Hg

Assembly is hipot tested @ connector rating

Temperature Range: -40°F to $+250^{\circ}\text{F}$ (see page 57)

For electrical assemblies, connector shell "floats".

OptiSeal™ Optical Fiber Hermetic Connectors

Attenuation in optical fiber feedthrus is primarily a function of the connector's limits (as installed). For a virtually ZERO attenuation feedthru, you can specify a custom designed and fabricated direct optical fiber feedthru where the fiber itself is sealed within the housing or flange and the fiber extends out from each end to any length specified.

Because the fiber is not interrupted within the housing, negligible attenuation is introduced.

Custom Fiber Optic Feedthru:

If a "standard" design OptiSeal™ Feedthru doesn't fit your requirements, please see page 8, or call **Toll Free at 1.800.533.8068** for a full discussion of alternatives.

Connector Type	Fiber Size	1" Face Seal	1.25" Face Seal	2.75" Vacuum Flange
Biconic	125 NM	25300	25310	25320
2.5 MM Bayonet	125 NM	25301	25311	25321
SMA (Stainless Steel)	100-140 Microns	25302	25312	25322
SMA (Stainless Steel)	50-125 Microns	25303	25313	25323

Coaxial Cable Connector Hermetic Feedthrus

Coaxial Connector Type	Nominal Cable Impedance	Withstand Voltage	1" Face Seal	1.25" Face Seal	2.75" Vacuum Flange
BNC	50Ω	500 VAC	25400	25407	25414
SMA	50Ω	500 VAC	25401	25408	25415
N	50Ω or 50Ω	1500 VAC	25402	25409	25416
Triaxial	50Ω	1500 VAC	25403	25410	25417
UHF	Non-constant	500 VAC	25404	25411	25418
SHV	N/A	3500 VAC	25405	25412	25419
MHV	N/A	5000 VAC Non-constant	25406	25413	25420

*Housing dimensions are given on page 11.

To order PotCon™ Hermetic Feedthrus: For electrical assemblies, select the feedthru configuration. Order by catalog number. For

OptiSeal™ fiber optic feedthrus, contact us Toll Free at 1.800.533.8068 to discuss the internal fiber specifications. Complete ordering instructions are on the inside back cover of this catalog.

Thermocouple Alloy PotCon™ Connectors

We offer three alternates for Hermetically Sealed Connectors-and-Harnesses needing Thermocouple Alloys. They are:

- A-** Use copper conductors in the T/C circuit.
- B-** Specify connectors and harnesses which will use T/C alloy contacts and T/C alloy extension lead wires.
- C-** Feed T/C lead wire directly through the bulkhead with our Direct Wire Harness Feedthru.

These alternates are detailed below.

Alternate A

Standard Connectors with Copper Contacts

Some applications can tolerate a combination of T/C lead wires with copper leads. Here the T/C alloy lead wires are routed up to but not thru the bulkhead connector set. Standard copper contacts are fed thru the bulkhead connector set, then alloy lead wires are used again on the other side. Technical issues to resolve should include the loss of accuracy due to thermal gradients across the (copper) bulkhead connector set. A significant advantage of this approach is the lower cost of the (copper) connector set and shorter lead times.

To order PotCon™ Connectors for Alternate A, specify the catalog number of the connector/harness set you need.

Alternate B

Thermocouple Alloy Contacts in the Connectors

Our PotCon™ Hermetic Connector line can use T/C alloy pins, sockets, and interconnecting wires. The advantage of using alloy contact materials over Alternate A is in the accuracy of the thermoelectric reading. This advantage can be lost if cost or lead time is an important factor since alloy contacts are very expensive and can add substantially to lead times.

To order PotCon™ Connectors with Thermocouple Alloy Contacts, specify the catalog number of the PotCon™ Connector selected and add the ISA type code from the alloy data on page 37. For example, 24014 TYPE J specifies a catalog 24014 PotCon™ Connector with ISA TYPE J (Iron vs. Constantan) contacts. The negative and positive alloys (see the chart on page 37) will be assigned alternating connector positions starting with odd in the lowest (or "A") position. For connectors with an odd total number of contacts, the last contact position will be a single copper wire or contact.

Where the PotCon™ Connector specified has a wire harness or for mating harness-and-connectors, the thermocouple wire will be Extension Grade Duplex wire with Teflon® insulation. ISA Color Codes will be used for the wire and the tagged number will be the "lower" of the two contact positions occupied by the Duplex pair.

(See the Connector Contact Availability chart on page 37).

Alternate C

Direct T/C Leadwire Feedthrus

We can provide hermetic seals directly on any thermocouple lead wire. This allows you to route your T/C lead wires directly through the bulkhead with no interruption whatsoever. Contact resistance and/or corrosion, breakage, and gradient problems are eliminated and the frequently long lead times and high costs associated with T/C alloy connector contacts are avoided.

With our direct T/C lead wire feedthrus you may either select from our standard harness designs for both Face Seals and Vacuum Flanges or you can design-it-yourself (or ask for assistance) using the ReadySeal Feedthru designs starting on page 2.

Thermocouple Alloy PotCon™ Connectors


Availability of Thermocouple Alloys Contacts

MIL Spec	MIL-C-5015 MIL-C-83723 II			MIL-C-83723 I MIL-C-26482 2			MIL-C-38999 I			
Connector Type	Standard Circular w/Threaded Coupling			Miniature Circular w/Bayonet Coupling			Scoop Proof Miniature Circular w/Bayonet Coupling			
Contact (AWG)	8	12	16	12	16	20	12	16	20	22
Copper	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Constantan	No	Yes	Yes	Yes	Yes	Yes	No	Yes	Yes	Yes
Chromel	No	Yes	Yes	Yes	Yes	Yes	No	Yes	Yes	Yes
Alumel	No	Yes	Yes	Yes	Yes	Yes	No	Yes	Yes	Yes

Thermocouple Alloy Data

ISA Code	Alloy	Color Codes	Limits of Error (Whichever is greater) Doesn't include use or installation errors. For reference only.	Range for Thermocouple	
				Centigrade	Fahrenheit
E	Chromel Vs. Constantan	Purple+ Red-	$\pm 1.7^{\circ}\text{C}$ or $\pm 0.50\%$ $\pm 1.7^{\circ}\text{C}$ or $\pm 1.0\%$	0 to 900	32 to 1652
				-200 to 0	-328 to 32
J	Iron Vs. Constantan	White+ Red-	$\pm 2.2^{\circ}\text{C}$ or $\pm 0.75\%$	0 to 750	32 to 1382
K	Chromel Vs. Alumel	Yellow+ Red-	$\pm 2.2^{\circ}\text{C}$ or $\pm 0.75\%$ $\pm 2.2^{\circ}\text{C}$ or $\pm 2.0\%$	0 to 1250	32 to 2282
				-200 to 0	-328 to 32
T	Copper Vs. Constantan	Blue+ Red-	$\pm 1.0^{\circ}\text{C}$ or $\pm 0.75\%$ $\pm 1.0^{\circ}\text{C}$ or $\pm 1.50\%$	0 to 350	32 to 662
				-200 to 0	-328 to 32

Connector Specifications and Crimp Tooling



MIL Spec	MIL-C-5015 MIL-C-83723 Series II	MIL-C-83723 Series I MIL-C-26482 Series 2	MIL-C-38999 Series I
Connector Type	Standard Circular	Miniature Circular	Scoop Proof Miniature Circular
Coupling	Threaded	Bayonet	Bayonet

Connectors

Plugs Receptacles	MS 3456 MS 3451	MS 3476 MS 3471	MS 27467 MS 27466
Connector Class	R	L (Fluid Resistant)	T (Environment Resistant)
Shell Material	Aluminum Alloy	Aluminum Alloy	Aluminum Alloy
Finish	Electroless Nickel	Electroless Nickel	Electroless Nickel
Elastomer	Silicone Rubber	Silicone Rubber	Silicone Rubber
Insulator	Rigid Dielectric	Rigid Dielectric	Rigid Dielectric
Contact Material	Copper Alloy	Copper Alloy	Copper Alloy
Plating	#16 AWG Gold on Nickel #8 & #12 AWG Silver	Gold per MIL-G-45204	Gold Plating
Polarization	Key & Keyway	5 Way Key	5 Way Key
Contact Termination	Crimp, Rear Release	Crimp, Rear Release	Crimp, Rear Release

Crimp Tools *(Listed as: tool/positioner)*

#8 AWG	25500/25501 (see note)	N/A	N/A
#12 AWG	25502/25503	25502/25503	25502/25504
#16 AWG	25502/25503	25502/25503	25502/25504
#20 AWG	N/A	25502/25503	25502/25504
#22 AWG	N/A	N/A	Pins: 25505/25506 Sockets: 25505/25507

Note: Crimp Tool catalog No. 25500 is pneumatically operated. Contact us Toll Free at **1.800.533.8068** for details. All other tools are hand operated. Tools are furnished with instructions and required gauges for operation.



Configurations listed are for alternate positions available. Listing the displacement angles from the N, or Normal, position is beyond the scope of this guide, but we can supply the MIL-Spec diagrams upon request. To order PotCon™ Connectors with Alternate Insert Positions, specify the

PotCon™ Connector catalog number and note "Alternate Insert Position__" with each item ordered. NOTE that you must explicitly specify alternate for each component (PotCon™, Mates, and Mating Harness-and-Connectors). Unless specified, the N position will be provided.

Connector Type	Standard Circular			Miniature Circular			Scoop Proof Miniature Circular			
Coupling	Threaded			Bayonet			Bayonet			
MIL Spec	MIL-C-5015 MIL-C-83723 Series II			MIL-C-83723 Series I MIL-C-26482 Series 2			MIL-C-38999 Series I			
MS No. Plug	MS 3456			MS 3476			MS 27467			
MS No. Receptacle	MS 3451			MS 3471			MS 27466			
Amps/Contact	46	23	13	23	13	7.5	23	13	7.5	5
Test Voltage@Sea Level	2000	2000	1000	1500	1500	1500	1800	1800	1800	1300
Test Voltage@Altitude	N/A	N/A	N/A	375	375	375	200	200	200	200
AWG of Contacts	8	12	16	12	16	20	12	16	20	22

[illegible]

D-Sub Feedthru Connectors

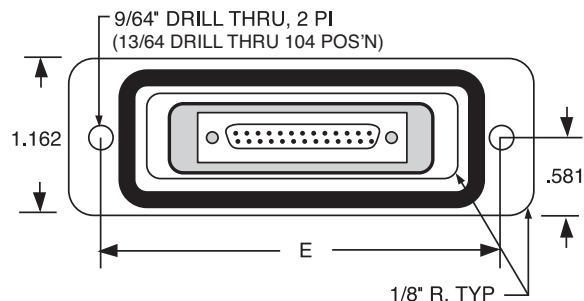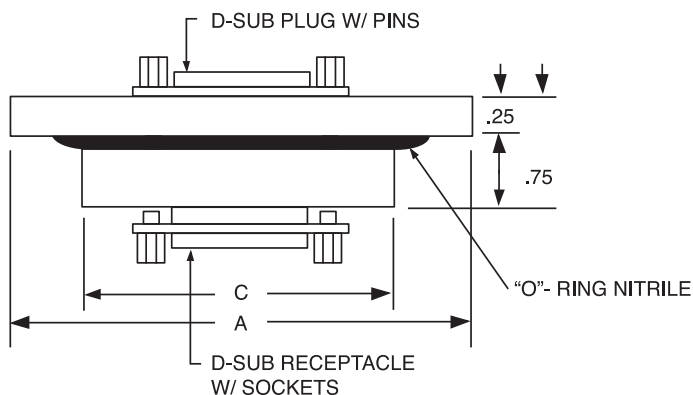

Specifications

Limits and QC Testing:

- 100% Tested to a Helium Leak: $< 1 \times 10^{-8}$ cc-He/sec
- 100% Tested to Hipot: 600VAC
- available for use: 100 PSI to 10^{-8} TORR
- Vacuum Levels 1×10^{-8} mm Hg
- Temperature Range: -40F to 225F

Options:

- Douglas can exactly duplicate competitors' designs lowering leadtime and price
- Alternate connector shell and insert materials
- Alternate insert configurations including micro-d, power, coaxial and combination inserts available
- Higher temperature configurations available on request
- Thermocouple contacts available upon request
- Mating Connectors and cable harness assemblies are available upon request
- Vacuum bakeout services available upon request

Connector

Connector Body:

Dependent on the top part number specified. Low outgassing shell materials and insert configurations available.

Connector Insert material:

Zinc Shell: Diallyl Phthalate
 Stainless Shell: Glass filled polyester
 Tin Shell: Thermoplastic
 Gold Plated Shell: Glass filled polyester
 *Alternate insert materials available upon request

PINS	HSG Mtl	D-sub Shell Material			
		Zinc Plated Stl	Tin Plated Stl	Stn Stl	Gold Plated Brass
9	Alum	29594/AL/Z	29594/AL/T	29594/AL/S	29594/AL/G
	Stn Stl	29594/SS/Z	29594/SS/T	29594/SS/S	29594/SS/G
15	Alum	29526/AL/Z	29526/AL/T	29526/AL/S	29526/AL/G
	Stn Stl	29526/SS/Z	29526/SS/T	29526/SS/S	29526/SS/G
25	Alum	29595/AL/Z	29595/AL/T	29595/AL/S	29595/AL/G
	Stn Stl	29595/SS/Z	29595/SS/T	29595/SS/S	29595/SS/G
37	Alum	29596/AL/Z	29596/AL/T	29596/AL/S	29596/AL/G
	Stn Stl	29596/SS/Z	29596/SS/T	29596/SS/S	29596/SS/G
50	Alum	48122/AL/Z	48122/AL/T	48122/AL/S	48122/AL/G
	Stn Stl	48122/SS/Z	48122/SS/T	48122/SS/S	48122/SS/G
15 (HD)	Alum	29705/AL/Z	29705/AL/T	29705/AL/S	29705/AL/G
	Stn Stl	29705/SS/Z	29705/SS/T	29705/SS/S	29705/SS/G
26 (HD)	Alum	29706/AL/Z	29706/AL/T	29706/AL/S	29706/AL/G
	Stn Stl	29706/SS/Z	29706/SS/T	29706/SS/S	29706/SS/G
44 (HD)	Alum	29707/AL/Z	29707/AL/T	29707/AL/S	29707/AL/G
	Stn Stl	29707/SS/Z	29707/SS/T	29707/SS/S	29707/SS/G
62(HD)	Alum	29708/AL/Z	29708/AL/T	29708/AL/S	29708/AL/G
	Stn Stl	29708/SS/Z	29708/SS/T	29708/SS/S	29708/SS/G
78(HD)	Alum	50703/AL/Z	50703/AL/T	50703/AL/S	50703/AL/G
	Stn Stl	50703/SS/Z	50703/SS/T	50703/SS/S	50703/SS/G
104(HD)	Alum	46396/AL/Z	46396/AL/T	46396/AL/S	46396/AL/G
	Stn Stl	46396/SS/Z	46396/SS/T	46396/SS/S	46396/SS/G

Continued from page 40

D-Sub Feedthru Connectors

Specifications

Pins and Sockets:

500 cycle Gold plated Copper per M39029/* (/58-360, /57-346, /64-369 and /63-368)

Clocking:

All connectors have normal clocking as default, alternate clockings available upon request.

Mating Connectors:

Available at customer request.

Bulkhead Housing Material:

Materials:

Aluminum or Stainless Steel are standard, alternate materials available upon request.

O- Ring:

Nitrile Rubber is standard but alternate materials available upon request.


Epoxy Sealant:

Low outgassing material (see page 60 for details)

Housing Designs:

Available either in rectangular (shown) or in Conflat, QF, ISO, Vacuum facesal or custom design.

Spotface and Through-Hole Dimensions

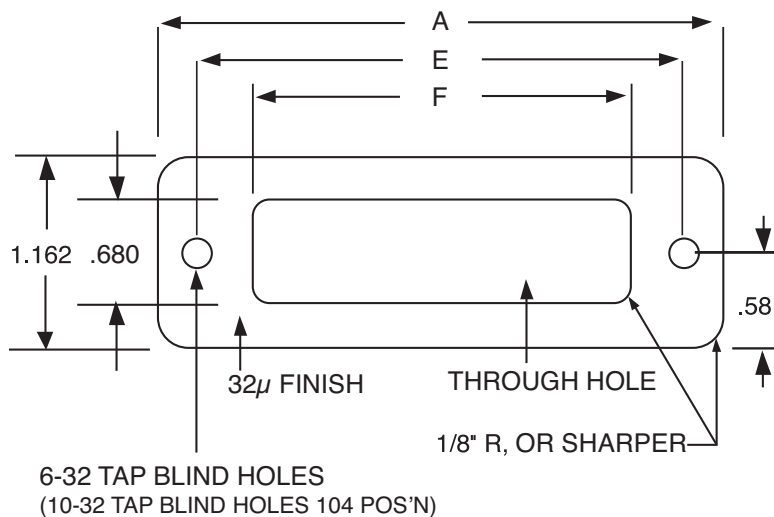


Aluminum and Stainless Steel Flange

PINS	A	C	E	F	base p/n
9	2.78	1.75	2.34	1.77	29594/*/*
15	2.78	1.75	2.34	1.77	29526/*/*
25	3.28	2.25	2.84	2.27	29595/*/*
37	3.83	2.80	3.39	2.82	29596/*/*
50	3.83	2.80	3.39	2.82	48122/*/*
15 (HD)	2.78	1.75	2.34	1.77	29705/*/*
26 (HD)	2.78	1.75	2.34	1.77	29706/*/*
44 (HD)	3.28	2.25	2.84	2.77	29707/*/*
62(HD)	3.83	2.80	3.39	2.82	29708/*/*
78(HD)	3.83	2.80	3.39	2.82	50703/*/*
104(HD)	3.93	2.90	3.49	2.92	46396/*/*

PotCon™ Hermetic Connectors

Nomenclature

A PotCon™ Hermetic feedthru Connector consists of a stainless steel housing or flange with plugs, receptacles or wire harnesses embedded in and hermetically sealed with a proprietary, high strength, low outgassing epoxy sealant compound. Virtually any connector or harness may be specified.

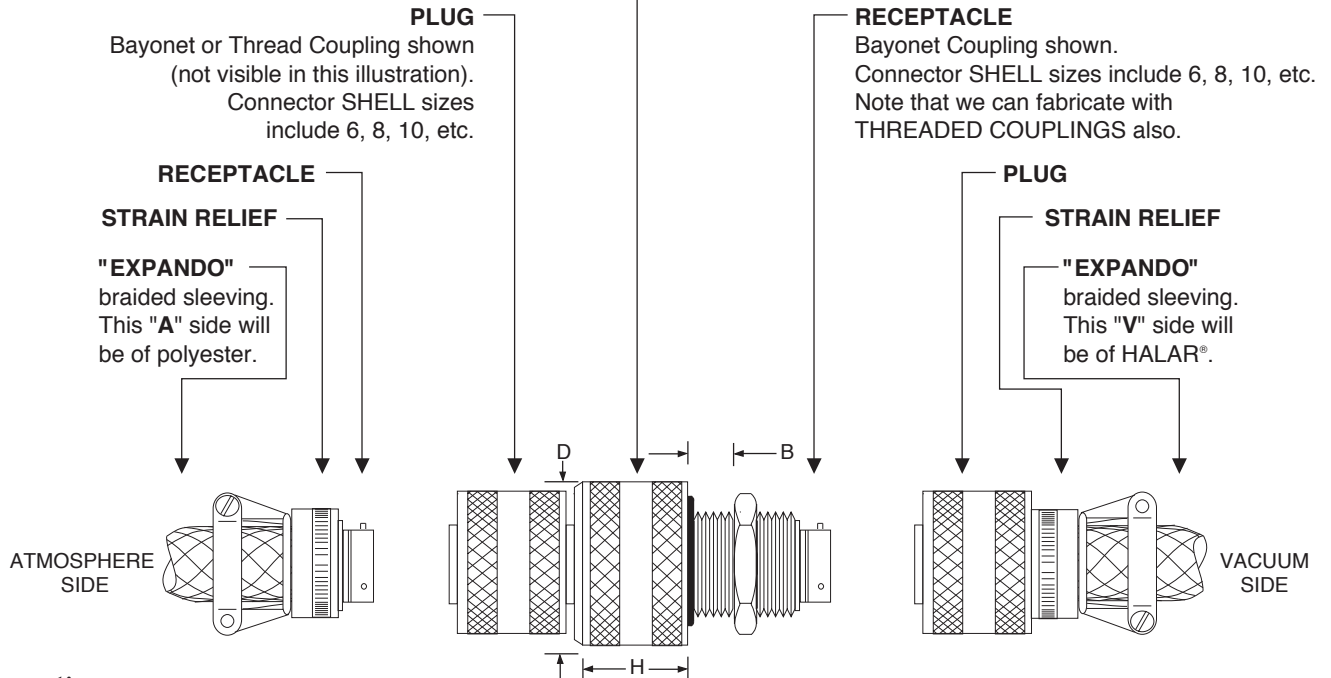

Hermetic:

After 5 minutes exposure to 100% Helium on side "A" and vacuum on side "V", the detectable leakage shall be less than 5×10^{-8} std cc He/sec.

Hsg	Thread	D	B	H
1	1.00"-20	1.63"	1.10"	1.72"
2	1.25"-18	1.75"	1.10"	1.95"
3	1.75"-18	2.25"	1.10"	2.75"
4	2.75"-16	3.50"	1.10"	3.56"

The "V", or vacuum, or inside-the-glovebox side usually has **Sockets** in the connector because power is normally fed from the "A" side to the "V" side. The socket configuration is partially shrouded as a means of preventing short circuits or shocks.

We can fabricate PotCon™ assemblies with either **Plugs** or **Receptacles** or **Wire Harnesses** in either or both ends. Additionally, the **Contacts** in the connector **Shell** may be either **Pins** or **Sockets** on either side of the Potcon™ **Housing** depending on customer preference. (See note above.)

The MIL-Connector Series offered in this line include:

- MIL-C-5015
- MIL-C-83723 Series I & II
- MIL-C-26482 Series 1 & 2
- MIL-C-38999 Series I

All the contact configurations available for these series can be fabricated in Hermetically Sealed versions. See our **Connector Configurations** on page 43. Wire is per MIL-W-16878/5 (Teflon® insulation, stranded, plated conductors.)

Notice...

- You never want to specify either:
- Pins on both sides of Potcon™ or
 - Sockets on both sides of Potcon™

Never.....ever.

You will have major clocking problems with the mating connectors.

PotCon™ Hermetic Connectors

Connector Configurations

This is a compilation of popular contact configurations for our three standard MIL-connector series. We offer all of them as hermetically-sealed assemblies. Configurations

marked • are described in detail (for Contact sizes #8...#22 AWG) on pages 14 through 33.

# of Contacts	MIL-C-5015 MIL-C-83723 II					MIL-C-83723 I MIL-C-26482 2			MIL-C-38999 I			# of Contacts	MIL-C-5015 MIL-C-83723 II					MIL-C-83723 I MIL-C-26482 2			MIL-C-38999 I									
	Standard Circular					Miniature Circular			Scoop Proof Miniature Circular				Standard Circular					Miniature Circular			Scoop Proof Miniature Circular									
	Threaded Coupling					Bayonet Coupling			Bayonet Coupling				Threaded Coupling					Bayonet Coupling			Bayonet Coupling									
	AWG 0 4 8 12 16					AWG 12 16 20			AWG 12 16 20 22				AWG 0 4 8 12 16					AWG 12 16 20			AWG 12 16 20 22									
1	1	1	1	1	1							16					16		16				16							
2	2	2		2	2			2		2		16				2	14													
2		1			1							17					17													
2	1			1								18											18				18			
3 •				3	3	3		3	3			3					19 •				19	19		19	19		19			
3					2	1						20					20													
3				1		2						21 •								21				21						
4 •	4	4	4	4	4	4	4		4		4	4	22																	22
4	1					3						22					4	18												
4				1	3							22	2				2	18												
4					2	2						23						23												
4				2		2						23					5	18			2	21			2	21				
5 •		5			5	5		5			5	5	23			1	4	18		1	22									
5				2		3	4		1				23			2	3	2	16											
5		3			2							24						24				24						24		
5		2			1	2						24										24			12	12				
5				2	3							25	1	1	1	4	18											25		
5		2			3							26 •					26				26							26		
5	2				3							26	1				1	24												
6 •						6		6		6		6										27						27		
6					2	4						27								16		11								
6				2		4						28															2	26		
6				3		3						29 •															29			
6		3				3						29			4	9		16												
6					5	1						30					6	24		1	29				1	29				
6	3				3							31			1	2	14	14		31										
6	2	4										32 •											32					32		
7 •				7	7	7					7	32							6				26						32	
7					2	5						34											34						34	
7				1	3	3						35						35												
7		2	2	3								35					7	28												
8 •					8	8	8	8	8		8	8	36																36	
8					1	7						37						37												37
8	2				6							39								2	37		2	37						
9				3		6	4		5	9		41 •																	41	
9					2	7						41								14	27									
9					1	8						43														20	23			
9				1		8						46						46												
9					3	6						47					1	46												
9	1	2			2	4						47					7	40												
10						10		10			10	47				1	22	24												
10				1		9						48 •						48												
10					4	6						52						52												
11 •						11		11			11	53																	53	
11					2	9						54						54												
12						12	12					55 •									55						55	55		
12					6	6		4	8		4	8	56				4	52						8	48					
12					2	10						60						60												
13							8		5			61 •									61									
14						14	6		8			66																	66	
14					2	12						67																	67	
14			2			12						79																	79	
14					10	4						85						85												
15						15		1	14		1	14	100 •																100	
15	3	2	4	6			12		3				128 •																128	

Sealed Studs/Motor Terminals

Our line of StudSeal™ Sealed Studs/Motor Terminals have been designed to offer a selection of solid copper, heavy current conductors sealed in a wide variety of standard housings... easy to specify and mount.

The environment to be sealed can range from high pressure to high vacuum, liquids or gasses and with a maximum current loading to 750 amps at 5KV.

The pressure environment seals on page 45 have been accepted for use in power transformers, and air conditioning and refrigeration hermetic compressors. Our materials have been subjected to rigorous testing in oils, R-12, R-22, R134a, and R-123 with no effect noted during elevated temperature exposure nor during numerous pressure cycles.

In vacuum systems ranging from “industrial” vacuums to high vacuums operating at 10⁻⁹ Torr, our studs have been successfully specified at significant cost savings.

In addition to the standard models listed in the following pages, we can seal virtually any size or style stud in a housing of your choice, inexpensively priced, in quantities from single pieces to thousands per year.


Years of testing in actual field installations of refrigeration compressors have yielded no failures or defects.

Table of Contents

Studs for Pressure Applications	45
Studs for Vacuum Applications	46
Terminal Plate Feedthru Seals	47

Studs for Pressure Applications


SAE Housing

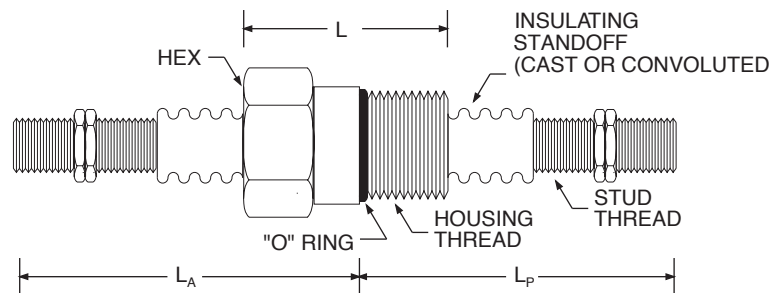

Stud Thread	Housing Thread	Housing Material	L _A	L _P	L	HEX	Maximum Current	Catalog Number
1/4" - 20	3/4" - 16	S.S.	1.95"	3.14"	1.19"	1.0"	105 amps	27404
3/8" - 16	3/4" - 16	S.S.	2.70"	2.39"	1.19"	1.0"	275 amps	27405
1/2" - 13	7/8" - 14	S.S.	2.80"	2.51"	1.34"	1 13/16"	500 amps	27406
5/8" - 11	1 1/16" - 12	S.S.	4.36"	3.31"	1.27"	1 3/8"	750 amps	27407

"O" Ring is nitrile rubber. See page 59 for mounting boss dimensions. S.S. = Stainless Steel.

NPT Housing

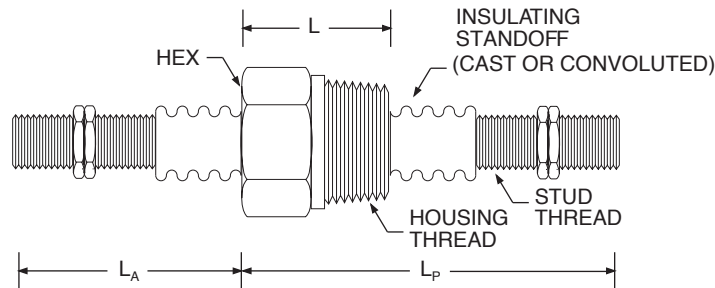

Stud Thread	Housing Thread	L _A	L _P	L	HEX	Maximum Current	Catalog Number
1/4" - 20	1/2" NPT	2"	3.09"	1.09"	7/8"	105 amps	27408
3/8" - 16	3/4" NPT	2"	3.17"	1.17"	1 1/8"	275 amps	27409
1/2" - 13	1" NPT	2"	3.36"	1.36"	1 3/8"	500 amps	27410
5/8" - 11	1" NPT	3.38"	4.29"	1.36"	1 3/8"	750 amps	26212

Specifications

Insulation: Epoxy

Standoff: Epoxy, except 5/8" - 11, which is convoluted

Conductor: Copper Alloy 110

Nuts: Brass, four per conductor

Operating Parameters

Pressure: To 1000 psi (higher pressure designs available)

Temperature: -40°F to 225°F


Vacuum: To 29 in Hg
High vacuum should use our vacuum housings on page 46.

Voltage: 5KV

Voltage for 27406 and 27407 is limited to 1000V.


Studs for Vacuum Applications

Flange Housing

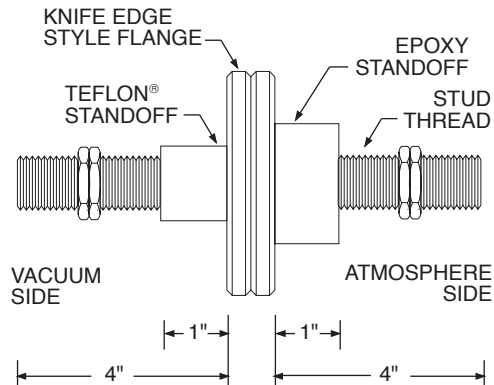

Flange Size	Stud Thread	Catalog Numbers			
		1 Stud	2 Studs	3 Studs	4 Studs
1.33"	3/8"-16	27387	N/A	N/A	N/A
2.75"	1/2"-13	27388	N/A	N/A	N/A
2.75"	5/8"-11	27389	N/A	N/A	N/A
4.50"	3/8"-16	27391	27392	27393	27394
4.50"	1/2"-13	27395	27396	27397	N/A

"O" Ring Face Seal Housings

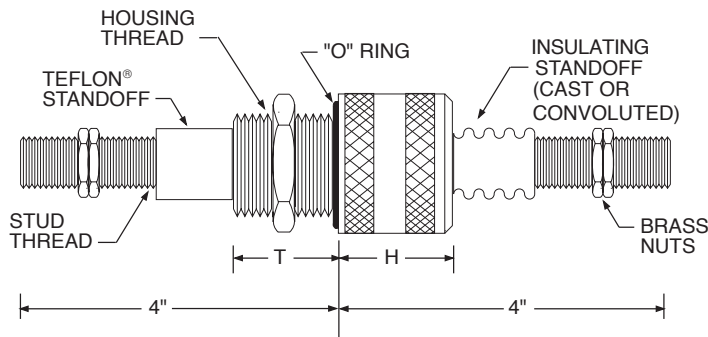

Stud Thread	Catalog Numbers		Size of Stud	Ampacity in Vacuum
	1"-20 HSG	1 1/4"-18 HSG		
3/8"-16	27398	27399	3/8"	137 Amps
1/2"-13	N/A	27401	1/2"	250 Amps
5/8"-11	N/A	27403	5/8"	375 Amps

Housing Thread	T	H
1"-20	1.25"	1.88"
1.25"-18	1.25"	1.63"

Specifications

Materials

Housing: Stainless Steel

Conductor: Copper

Standoff: Epoxy, except 5/8"-11, which is Ryton. Insulating standoffs have smooth OD except 5/8"-11, which is convoluted

Sealant: Low outgassing epoxy, see page 60

Nuts: Brass, four per conductor

"O" Ring: Nitrile Rubber

Operating Parameters

Pressure: To 25 psi

Temperature: -40°F to 225°F

Vacuum: To 10⁻⁹ Torr

Voltage: To 5KV


Leak Rate: <1 x 10⁻⁸ cc/sec (He)

Terminal Plate Feedthru Seals

Terminal Plate Feedthru Seals provide hermetic sealing capability for multi-conductor, medium to heavy current requirements. Here are some examples of successful designs. Call us to discuss your design requirements.


Stud Plate

Threaded, heavy current studs mounted through a large plate, hermetically sealed to 500 psi operating pressure (proof pressures to 1000 psi) and feed up to 750 amps at 440V through as many as 15 conductors per plate. Our helium leak rate is less than 1×10^{-8} cc/sec per conductor.

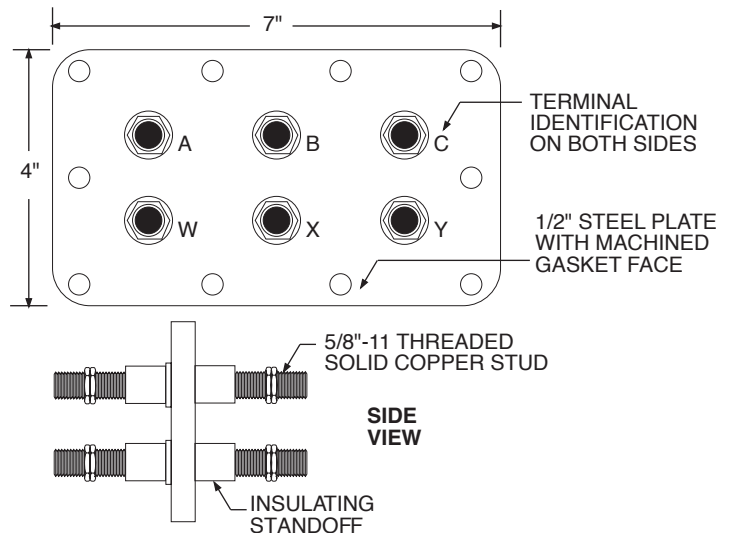


Pin Plate

Sealed copper alloy pins provide the convenience of individual slip-on terminals while offering reliability and vibration resistance.

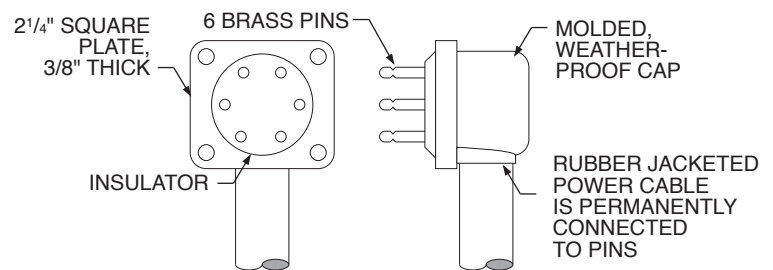

Slip-on Plate

Standard 1/4" slip-on terminals are sealed within a solid, molded Ryton® body providing hermetically sealed penetrations to 350 psi (operating). Custom designs are easily accommodated for medium to high quantity production requirements.

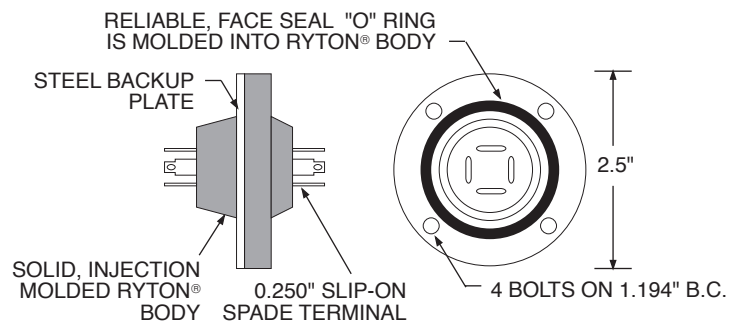

These are three examples of our capacity to provide special feedthru plates for multi-conductor, medium to heavy current requirements. These plates can be used to penetrate hermetically sealed compressors with current loadings to 750 amps per leg, operating voltages to 440V, operating pressures to 350 psi (proof pressures

to 1,000 psi) with as many as 15 conductors per plate. Our helium leak rate is less than 1×10^{-8} cc/sec per conductor.

Due to variations in mounting dimensions, conductor layouts and operating environments, feedthru plates must be custom application engineered to your specific requirements. We welcome your inquiries.

Unique Feedthru Systems

Multiple Feedthru Systems

In addition to providing a full line of hermetically sealed electric and fiber optic conductors, Douglas Electrical Components also offers to furnish complete, fully assembled and tested Multiple Feedthru Port Plates.

We can offer finished, ready-to-pump feedthru plates in heretofore unimaginable density and conductor counts, all from a single source, and ready to go.

Our 15 years of performance-proven experience is designed into each assembly. Our own vacuum test facility has a 3-foot diameter by 4-foot deep vacuum chamber for Helium leak testing. We have fabricated and vacuum tested feedthru

assemblies that have weighed over one ton. This same chamber can be evacuated to 10^{-7} Torr at 300°F to outgas bake large plates or feedthru assemblies.

Electrical testing assures 100% performance and our hipot test gear has a capacity to test 1,024 leads at 1500VAC to each other and to ground. An automatic sequencing controller assures full conformance as well as preventing higher voltage inductive/capacitive kicks created by connectional switching.

We encourage your inquiries.

Specialty Feedthru Systems

We welcome challenging design problems and this section has been created to give you an overview of various products and services which have been developed in response to our customers needs for feedthrus.

The dynamic range of application environments for our feedthru products is astonishing, from 10^{-9} Torr through 15,000 psi and -40°F through +300°F.

We can provide a solution to your feedthru problem. Call us for an application engineering discussion.

Challenge Us!

Table of Contents

Multiple Feedthru Systems

Multiple Feedthru Portplates	49
Face Mount Housings	50

Specialty Feedthrus and Services


Vacuum Outgassing Service	51
Push-in Feedthrus	52
Convenience Feedthrus (110V)	52
Feedthru Housings-Design Variations	53
High Pressure Feedthrus	54
Direct Cast Seals	55
Product Development	55

Multiple Feedthru Portplates

Pre-Assembled and Pre-Tested

Pre-assembled, pre-tested multiple feedthru portplates are available from 6" through 48" in diameter. Features include:


- Vacuum outgassing bakeout for components or entire assembly.
- Shipped to your facility as a complete assembly, ready to install and pump.
- Can be provided with or without connectors.
- Full Helium leak testing to less than 1×10^{-9} cc/sec per feedthru.
- Custom designed and fabricated.
- Over 15 years of field-proven experience.
- Full strain relief available.

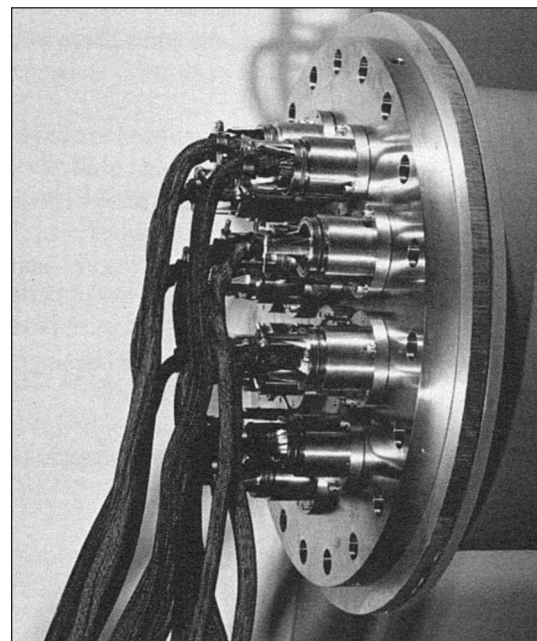


An assembled 36" port plate.

Layout Rules of Thumb

- Call us as early in the project as possible.
- PotCon™ connectors require a 2" minimum clearance around the housing for a hand access to tighten or loosen connector locking ring.
- Face seal housings for harness feedthrus (jam nut mounting) require a 1" minimum clearance for wrench access to make up the jam nut.
- Face mount housings (see page 50) require only a 1/2" clearance around the housing OD for the clamps (be sure to stagger the clamps of adjoining housings).
- Never try to fit too many feedthrus onto a plate, allow for unanticipated extra feedthrus.

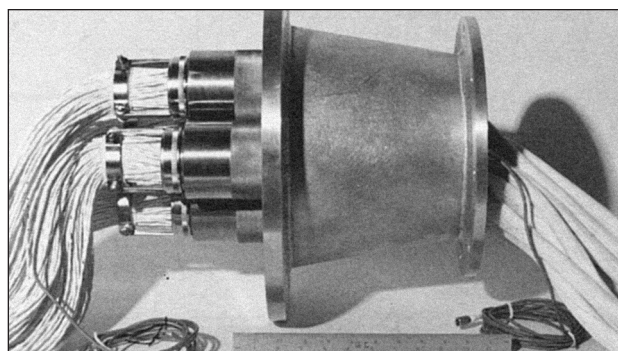

A custom adapter port plate.

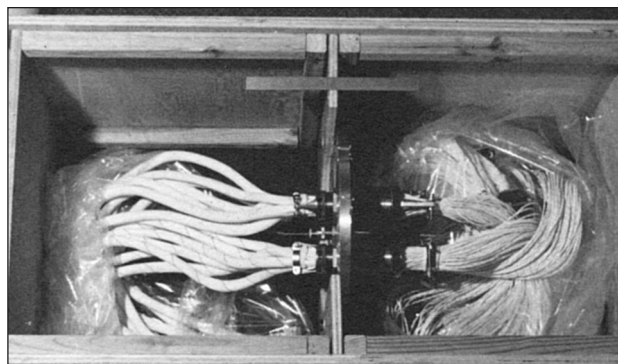

A large port plate assembly in its shipping crate.

Face Mount Housings



Face Mounting Housings for Hermetic Feedthrus improve feedthru density and ease installation. Features include:

- Complete installation from the atmosphere side of the port plate.
- No nuts to turn inside chamber.
- Easy change-out of the "O" Ring (if ever needed).
- Broad range of housing sizes significantly increase the area available for your wires.
- Eliminate the tendency to tighten the housing rather than the jam nut (poor vacuum practice).
- Optional strain relief available for both ends.

- Allow much denser packing of feedthrus on your port plate.
- Allow easy visual (or physical) confirmation of complete torque-up of mounting bolts.

Nominal Size	2.75"	3.75"	4"
Diameter of thru hole	2.760"	3.260"	4.010"
OD of Housing	3.40"	3.88"	4.63"
Clamping Bolts,Bolt Circle	3.92"	4.40"	5.15"
Diameter of Spot Face	4.50"	5.00"	5.75"
Area Available for Wires (Sq. In.)	7.0	10.3	15.0
Housing Length	3.50"	3.50"	3.50"
* #20 AWG Wires	475	640	933
* #12 AWG Wires	145	200	285
* #20 AWG Twisted Shielded Pairs	80	110	160

* Typical Capacity of Housing

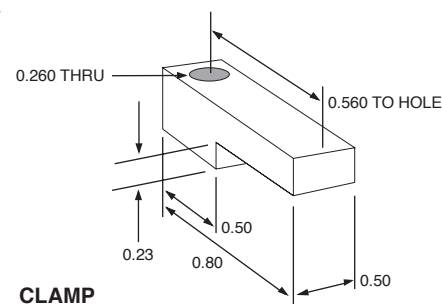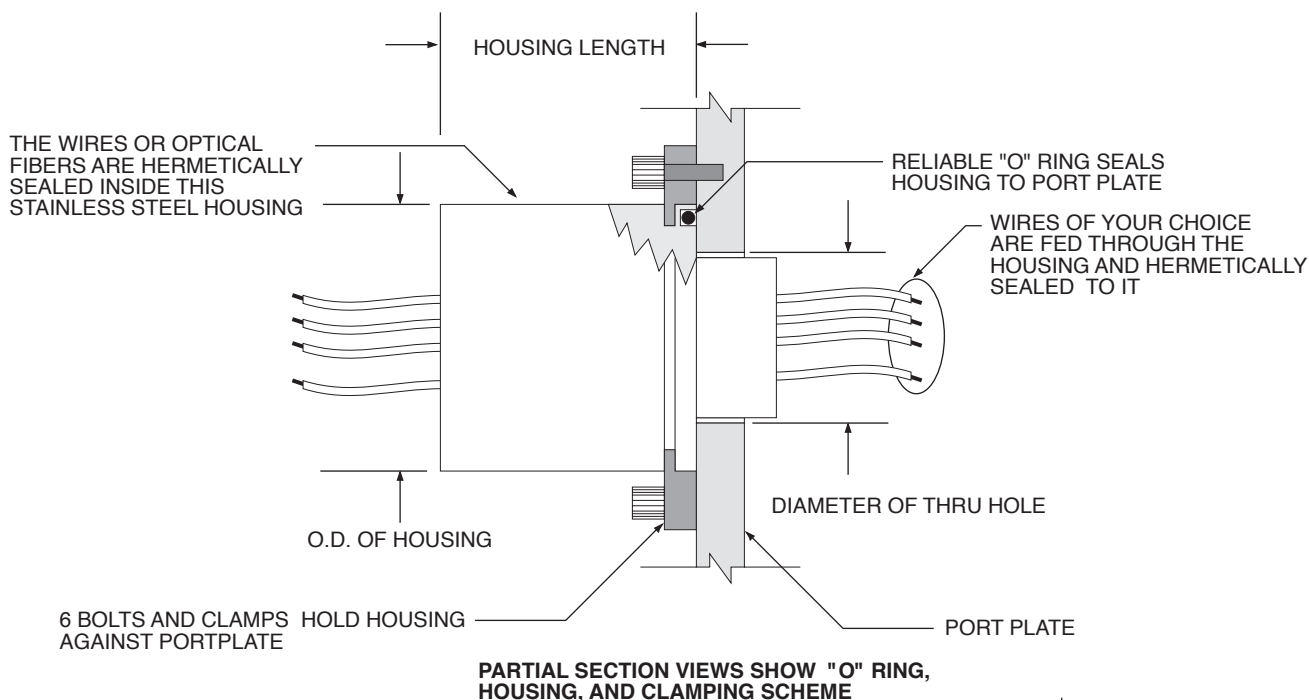

Vacuum Outgassing Service

We now offer Vacuum Outgassing Service for contract vacuum bakeout and cleanup of: Connectors, Harnesses, Feedthrus, Assemblies, and Components.

Note:


Some components may not be suitable for outgassing at the temperature and vacuum levels listed. Please contact us for a discussion of your needs.

Features:

- 300°F bakeout at 1×10^{-7} Torr
- 28 ft³ chamber capacity
- Clean room service bay
- 12 zones of temperature monitoring to assure uniform heating

- Post-bakeout helium MSLD (non-contaminating) test capability for feedthrus or sealed articles
- Pre-bake (optional) up to 500°F to reduce chamber load and time
- RGA monitoring and certification available
- Witness plate verification available
- Three independent controllers assure overtemperature protection
- Distributed radiant heating eliminates cold spots
- Ion gauge with strip chart recorder output
- Large capacity, oil-free cryo-pumped high vacuum system
- Separate, high efficiency condensate collection system

We welcome your inquiries about this new, unique service.

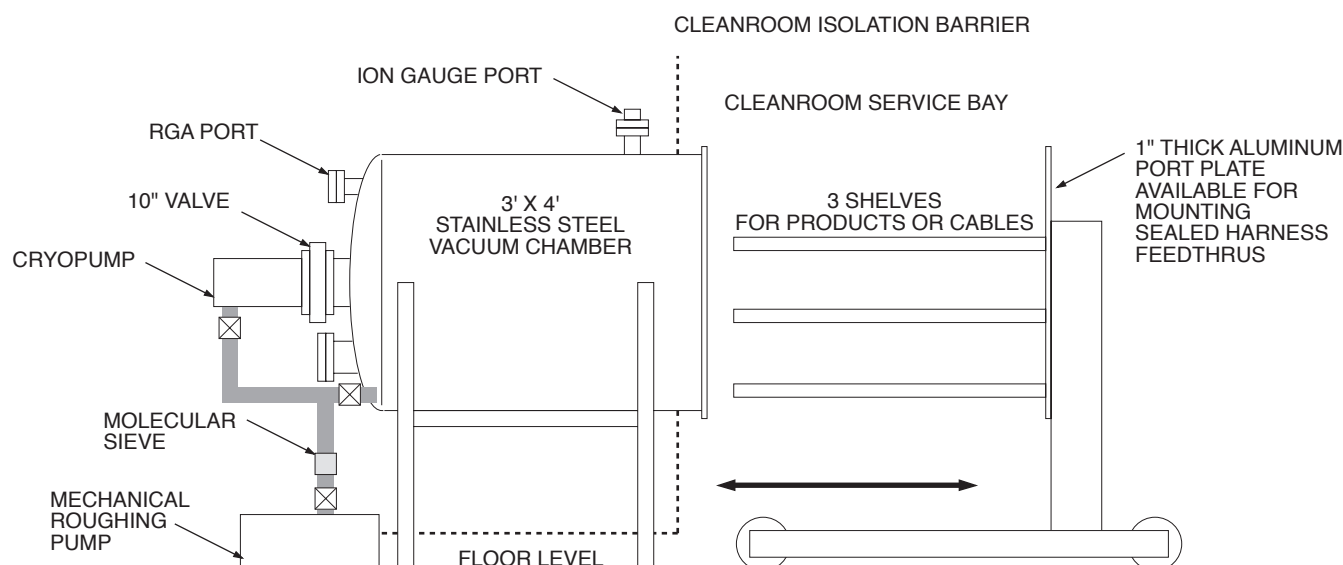

We have installed a high capacity, vacuum bake outgassing facility at our Rockaway, NJ plant. Originally developed to service our line of hermetic feedthrus, its unique capability is now available to the Aerospace community on a contract basis. A typical outgassing contract would entail the following:

1. A wire harness or feedthru/harness assembly would be fabricated either by us or by others and received at our facility.
2. An optional pre-bake (up to 500°F) would be performed to reduce the vacuum oven gas load and schedule.
3. The article would then be placed in the vacuum oven, or in the case of a feedthru/harness it would then be "fed through" the oven's endplate.
4. The oven would then be preheated to the specified bake temperature while monitoring the thermocouple test points for hot spots. The oven would be vented to atmosphere during this procedure.
5. Upon reaching temperature, the mechanical roughing cycle would be initiated. Roughing proceeds until a maximum vacuum level of 100μ is reached.
6. At 100μ , valve sequencing would expose the heated oven to the cryo pump. Cryo pumping continues until either:
 - a) the target vacuum level is attained for the specified time (e.g. 10^{-7} Torr for 72 hours), or
 - b) the desired atmosphere in the chamber, as determined by the RGA, is achieved.
7. The chamber would then be back-filled with dry N_2 , and upon cool down the product would be packaged in antistatic, heat sealed bags with optional dessicant.

Push-In Feedthru Seals

All models feature the ability to change conductor modules (feedthru seals) by abandoning the old module into a contaminated environment and inserting the new module from the outside.

All leak paths are 100% sealed and tested with helium.


Three options allow NPT, "O" Ring, or weld mounts.

A wide variety of conductors may be specified, including:

- Wires, all alloys including thermocouples
- Cables

- Complete wire harnesses
- Shielded wires-including coaxial twisted pairs, etc.
- Connectors-either as a harness or cast as part of the conductor module
- Combinations- including wires on one side and connectors on the other

Contact us for a technical discussion about your specific needs.

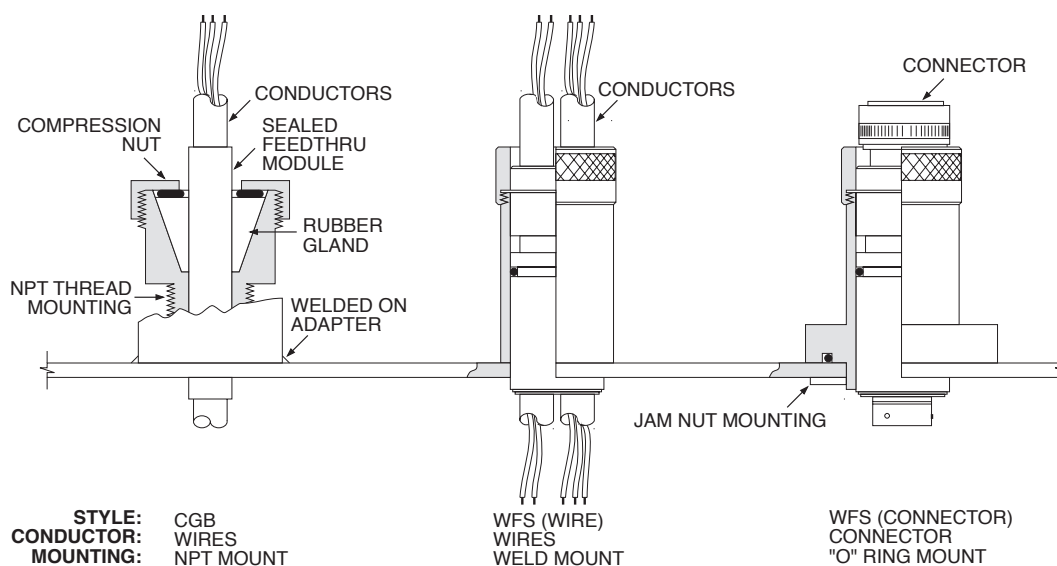


Convenience Feedthrus (110V)

Features:

- Convenient and easy
- Installs in box wall or blank glove port
- Choice of two models allows change to inside or to outside
- Provides a quick-fix 110 VAC outlet through a spare (or conveniently located) glove port
- Pre-tested and reliable
- Cost effective
- Custom models are readily available

Virtually any commercially available outlet or plug may be sealed using our procedures. For special applications, contact us Toll Free at 1.800.533.8068.

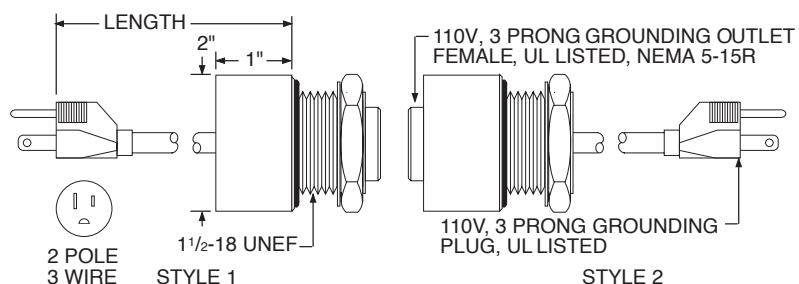

Both styles are supplied with "O" Ring, washer, and nut.

Wire-AWG	Length	Catalog Numbers	
		Style 1	Style 2
14 AWG	(Potted Stub)	43116-1	43116-2
16 AWG	0'-6"	12646-1	12646-2
16 AWG	9'-0"	12629-1	12629-2

Solid Stainless Plug with no outlet... Catalog Number 12660

Feedthru Housings-Design Variations

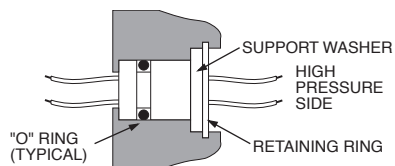


Figure 1

- An excellent design for high pressures.
- Removal requires access with a suitable tool.
- Difficult to verify full and complete installation of the retaining ring.
- Epoxy housings are generally suitable for most applications.

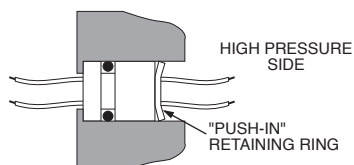


Figure 2

- Superior for high pressure.
- Installation is permanent. (Removal of retaining ring will leave deep scratches and will damage "O" Ring upon reinsertion.)
- Epoxy housings are generally suitable for most applications.




Figure 3

- "Semi-permanent" installation. (Removal of push-on is difficult and will probably damage the body.)
- Requires good surface finish on wall.
- Requires "forced bottoming" of the assembly to pre-load the face seal "O" Ring.




Figure 4

- Suitable for walls as thin as 0.100 inch.
- Easily removable with a suitable tool.
- Not recommended with epoxy body.




Figure 5

- Very fast assembly with push-on retaining ring.
- Suitable for both metal and epoxy bodies.
- "Semi-permanent" installation. (Difficult to remove the push-on ring.)




Figure 6

- For thick wall installation.
- Removal of ring requires access with a suitable tool.




Figure 7

- With double chamfer, can be installed or removed from either direction.
- Minimum machining of the wall is required.

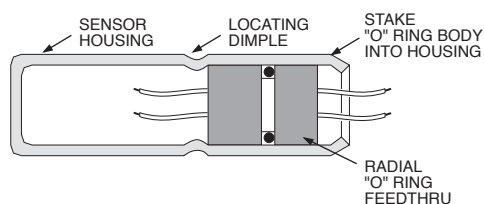


Figure 8

- Fast, inexpensive and extremely reliable for sealing transducer leads.
- Needs fewer solder points.
- Eliminates the need to weld a joint at the seal body.

High Pressure Feedthru Seals for 15,000 psi Service

Specifications

Materials

Housing: High strength epoxy resin and stainless steel composite housing

Seal: Epoxy, bonded to the conductor(s)

Conductor: Copper

"O" Ring: Viton A, 70° Durometer

Backup Ring: Teflon®

Performance


Pressure: 15,000 psi maximum
Certification to your specification is available

Hipot Test: Available to 5,000 VAC

Temperature: Usable from 0°F to 150°F



Conductor Lengths: Low-pressure length unlimited, high-pressure length is limited by the volume of our test chamber (200cu. inches)

Conductor Materials: Virtually any metallic conductor, including stranded and shielded cables, thermocouple alloys, fiber optic harness, etc.

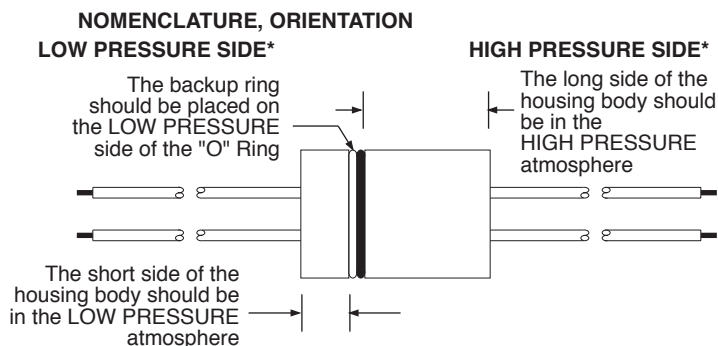

* Orientation is critical

SINGLE "O" RING DESIGN
(Custom designed housings are available.)


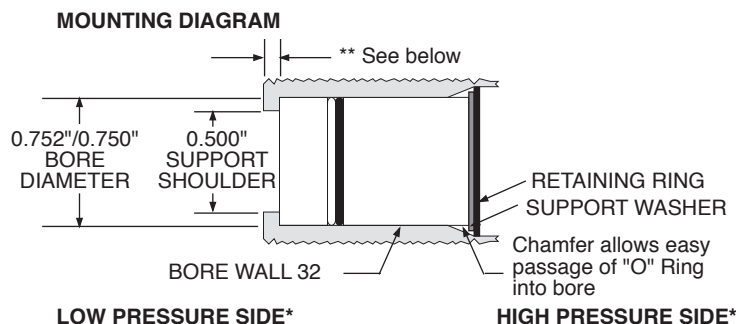
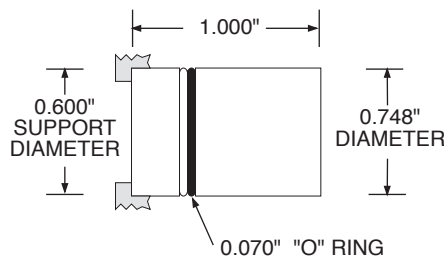


* Orientation is critical

** Allow enough shoulder material to support an axial force of 13,000 lbs at 15,000 psi
(This includes a 100% safety factor)

Warning: High pressures are potentially very dangerous. Only knowledgeable and experienced persons should attempt to design or use high pressure equipment or components.

Direct-Cast Seals

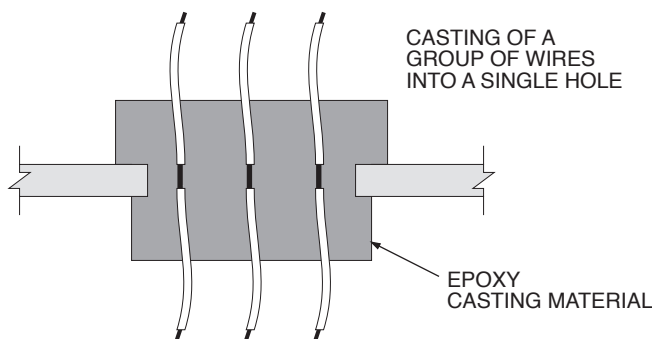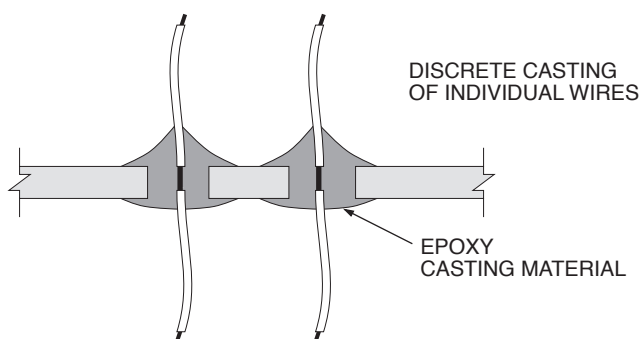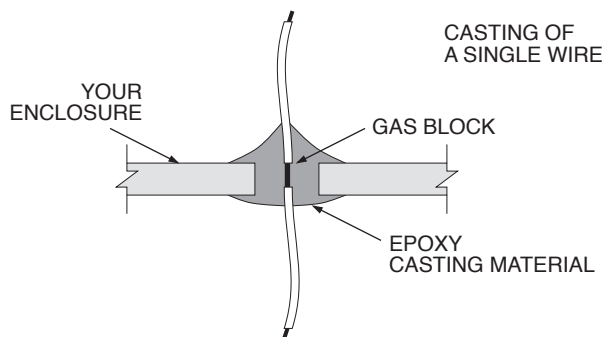

Features:

- We seal directly to your housing or enclosure
- Eliminates unnecessary housing expense
- 100% fool-proof
- Avoids assembly labor cost and quality problems
- Pre-testable for gas leakage and all electrical parameters
- Epoxy seals to gas-blocked conductors
- Cost-effective

This technique can hermetically seal your conductors directly to:

- Brass
- Aluminum (plates or castings)
- Stainless steel
- Engineering thermoplastics
- Many other materials

Custom conductors are available, including:

- Fiber optics
- Coaxial cables
- Shielded wires including twisted shielded pairs
- Multiconductor cables and harnesses
- Thermocouple alloys

All forms of direct-cast seals are custom designed and manufactured. Please feel free to discuss your particular needs with our engineering staff.

Product Developments

Douglas Electrical Components is interested in developing new products or refining products currently in development. We have identified areas of potential customer interest, including:

- **Cryogenic Feedthrus**
- **UL or FM Listed Devices**
- **High Temperature Seals**

Please call Toll Free at 1.800.533.8068 for further information or to discuss your needs.

Technical Data

Table of Contents

Tests on Feedthrus and Compounds	56
Equivalent Leak Rate, Testing for Leaks, Testing at High Voltage	57
Temperature, Vacuum, Pressure	58
Selection of Insulations, SAE Housing: Mounting Boss Dimensions	59
Physical Properties of Molding and Casting Compounds	60
Typical Insulation System Properties	61
Index (Sections 1-5)	62-63
Performance Summary, Ampacity	64

Test on Feedthrus and Compounds

Gamma Radiation Exposure

Two PotCon™ connectors were exposed to gamma radiation at a rate of 1.5×10^6 R/Hour and helium leak tested after doses of 100 m rad. Leak rates after this test were less than 4.3×10^{-11} cc/sec and all pin-pin resistance was greater than 10^{12} ohms. Tests were performed on compound 1469/1481. (AECL 29-63174-300-000)

Flammability Tests

Potting flammability test on three harness feedthrus with two #12 AWG wires. Ultimate current applied 175a in air and 145a in 100% oxygen. No flame was noted throughout and the test was concluded after conductor fusion. Tests were performed on compound 1469/1481. (WSTF #79-11713)

Upward flammability test also in air and 100% oxygen exposure resulted in a "self-extinguished" report. Tests were performed on compound 1469/1481. (WSTF #79-11713)

A UL® flammability test was performed on compounds 1469/1470, 1469/1481, 7113/1470 and 7113/1481. All achieved a 94HB classification. (E92366, 84ME10295)

Water Vapor Transmission

Three samples of 1469/1481 epoxy at 0.125" thickness were tested per ASTM-E-96-80. The average for the tests was 7×10^{-5} gms/day/cm².

Outgassing Tests

Samples of the materials were tested by NASA in accordance with ASTM E-595-93.

Compound	% Wt. Loss	% VCM	Visible Deposits
7113/1470	0.33%	<0.002%	None
7113/1481	0.26%	<0.002%	None

Explosion-Proof Testing

The following tests were performed by UL® labs in accordance with UL1203, per file number E228634, on lead wires sealed.

Leakage of Sealing Fitting Test: Passed <.007 FT³

Hydrostatic Pressure Test: Passed 6,000 psi

Accelerated Air Oven Aging: Passed 168h @ + 70°C.

Solvent Vapor Resistance Test: Passed 13 chemical vapor exposure tests.

Leachable Cations and Anions

A sample of our 1469/1481 Epoxy 150°C and 100% RH was analyzed for leachable cations and anions:

Cations (ug/g)		Anions (ug/g)	
Al	0.40	F ⁻	<0.1
Ca	0.27	Cl ⁻	2.4
Li	0.03	NO ₃ ⁻	<0.2
Mg	0.024	SO ₄ ⁻	<0.2
Na	6.3	Br ⁻	<0.2
K	0.016	NO ₂ ⁻	<0.1
Cu	0.026	HPO ₄ ⁻	<0.2
Zn	0.045		

Testing For Leaks

There are many methods of testing for leaks in enclosures. The more commonly used methods along with the range of accuracy provided are listed below:

Water Immersion (Air Bubble Observation)

This method is good to approximately 10^{-4} std cc/sec, and can be more sensitive if internal pressure is increased. This method is limited because of the difficulty in differentiating between leakage bubbles and surface desorption bubbles. It is used to test industrial items such as valves, hydraulic components, castings, and automotive and air conditioning components. We can pressure test to 15,000 psi.

Helium Method

This method is good to 10^{-11} std cc/sec. and is capable of finding leaks of any size. This method is used for testing hermetic seals, vacuum enclosures, and vacuum systems; and is the most versatile of industrial and laboratory leak detection testing methods.

Facts about Leak Rates

Visualizing Leaks in Everyday Terms:

10^{-5} std cc/sec = approximately 1 cc/day

10^{-7} std cc/sec = approximately 3 cc/year

Audible or Visual Detection by Observer:

Bubbles rising in water = 10^{-4} std cc/sec or larger

Audible leaks = 10^{-3} std cc/sec or larger

Sizes of Leaks in Manmade Joints:

Studies indicate that almost all leaks at joints are about 5×10^{-7} std cc/sec (about 1 cc/month) or larger. Diffusion of helium through glass may be as high as 10^{-8} std cc/sec per square centimeter of surface area.

Variations in Leak Sizes:

Leaks unintentionally "built in" at joints during manufacture may vary from hour to hour and day to day. Breathing on a 10^{-6} std cc/sec vacuum leak provides enough moisture to close it temporarily, perhaps for days. Atmospheric dust particles can close a leak of this size.

Equivalent Leak Rates

In the following table, all numbers on the same line (reading across) are approximate leak values AT THE SAME PRESSURE through the same physical leak and for all practical purposes may be used interchangeably.

Experimental data indicates that no visible water will leak when dry air at the same pressure will leak at the rate of 1×10^{-4} cc/sec, probably because of the surface tension. To be on the safe side, it is believed that enclosures containing liquids (water, oil, etc) should have no leaks at RATED PRESSURE that will pass more than 1×10^{-4} std cc of air per second.

Air at Standard Condition			Refrigerant R-12 Leakage	
cc/sec	cu.in/ day	oz./yr.	time for 1 lb. to leak	immersion test bubble time
1.8×10^{-2}	100	100	0.16 yr.	1.3 sec.
1.8×10^{-3}	10	10	1.6 yrs.	13.3 sec.
1.0×10^{-4}	1	1	16 yrs.	145 sec.
9×10^{-5}	0.5	0.5		
1.8×10^{-5}	0.1	0.1		
1.8×10^{-6}	0.01	0.01		

Testing at High Voltage

As appropriate, feedthrus are tested at high voltage to confirm their performance. We have testing facilities adequate for testing up to 30,000 volts and can test an unlimited number of circuits to each other at high voltage.

Our specialized test equipment for multiple contact circuits prevents high voltage "ringing" failures during testing of long lengths of multi-conductor cables by controlling the rate of voltage applied during both "on" and "off" cycles.

Thermal Exposure

Temperature Limits:

Recommended operating limits are -40°F to $+250^{\circ}\text{F}$. Exposures to -80°F through $+350^{\circ}\text{F}$ have been reported by customers who have evaluated individual feedthru designs under controlled environments and applications. However, for performance beyond the recommended -40°F to $+250^{\circ}\text{F}$, please consult the factory.

Thermal shock:

Our feedthrus have passed leak testing (at room temperature) after being immersed in LN_2 and after cycling from $+250^{\circ}\text{F}$ to ice water and back to $+250^{\circ}\text{F}$.

Custom designs are also available for true cryogenic applications.

Temperature

Formula

$$\begin{aligned}
 ^\circ\text{F} &= [^\circ\text{R}] - 459.69 \\
 &= [^\circ\text{C}] \times 9/5 + 32 \\
 &= ([^\circ\text{K}] - 273.16) \times 9/5 + 32 \\
 ^\circ\text{C} &= [^\circ\text{K}] - 273.16 \\
 &= ([^\circ\text{F}] - 32) \times 5/9 \\
 &= ([^\circ\text{R}] - 491.69) \times 5/9 \\
 ^\circ\text{R} &= [^\circ\text{F}] + 459.69 \\
 &= [^\circ\text{C}] \times 9/5 + 491.69 \\
 &= ([^\circ\text{K}] - 273.16) \times 9/5 + 491.69 \\
 ^\circ\text{K} &= [^\circ\text{C}] + 273.16 \\
 &= ([^\circ\text{F}] - 32) \times 5/9 + 273.16 \\
 &= ([^\circ\text{R}] - 491.69) \times 5/9 + 273.16
 \end{aligned}$$

Quick Conversion

$^{\circ}\text{C}$	$^{\circ}\text{F}$
-50	-58
-40	-40
0	32
25	77
105	221
125	257
135	275
150	302
175	347
200	392

Cryogen Boiling Points

	$^{\circ}\text{F}$	$^{\circ}\text{C}$	$^{\circ}\text{R}$	$^{\circ}\text{K}$
He	-452.1	-268.9	7.6	4.22
H ₂	-423.2	-252.8	36.5	20.3
N ₂	-320.5	-195.8	139.2	77.1
Air	-380.9	-194.4	141.8	78.8
O ₂	-297.2	-182.9	162.3	90.3

Absolute Zero

- 459.69 $^{\circ}\text{F}$

- 273.16 $^{\circ}\text{C}$

0 $^{\circ}\text{R}$

0 $^{\circ}\text{K}$

Vacuum/Pressure

	Pascal (N/m ²) (Pa)	Torr	Standard Atmosphere (atm)	Millibar (mbar)	Dyne per Sq. Centimeter (dyne/cm ²)	Pounds per Sq. In. psi
1 Newton per Square Meter (N/m ²) = Pascal	1	7.5 x 10 ⁻³	9.87 x 10 ⁻⁶	10 ⁻²	10	1.45 x 10 ⁻⁴
1 Torr = 1 mm Hg	133	1	1.32 x 10 ⁻³	1.33	1,330	1.933 x 10 ⁻²
1 Standard Atmosphere (atm)	101,000	760	1	1,010	1,010,000	14.69
1 Millibar (mbar)	100	0.75	9.87 x 10 ⁻⁴	1	1,000	1.45 x 10 ⁻²
1 dyne/square Centimeter (dyne/cm ²)	10 ⁻¹	7.5 x 10 ⁻⁴	9.87 x 10 ⁻⁷	10 ⁻³	1	1.45 x 10 ⁻⁵
1 psi	6.873 x 10 ³	51.7	6.8 x 10 ⁻²	68.8	68.8 x 10 ³	1

Altitude (Above Sea)		Pressure (mm Hg or Torr)
km	miles	
0	0	760
10	6.21	210
20	12.43	42
50	31.07	7.5 x 10 ⁻¹
100	62.14	4.2 x 10 ⁻⁴
150	93.21	3 x 10 ⁻⁶

Selection of Insulations

Value Analysis

Design Factors

Service Temperature Range
Current Carrying Capability
Size and Weight
Opportunity for Innovation

Production Factors

Soldering Iron Resistance
Solder Resistance
Rework Characteristics
Flexibility
Conformability
Ease of Stripping
Ease of Secondary Operations
Notch Sensitivity
Solvent Resistance
Shield Pushback Characteristics


Performance Factors

Flammability
Overload Endurance
Aging Characteristics
Stress Cracking
Low Temperature Toughness
Cut-through Resistance
Abrasion Resistance
Fungus Resistance


Economic Factors

Price
Availability
Preparation Costs
Installation Costs
Rework Costs
Project Reliability
Corporate Image
Proprietary Designs
Standardization

Thermometer

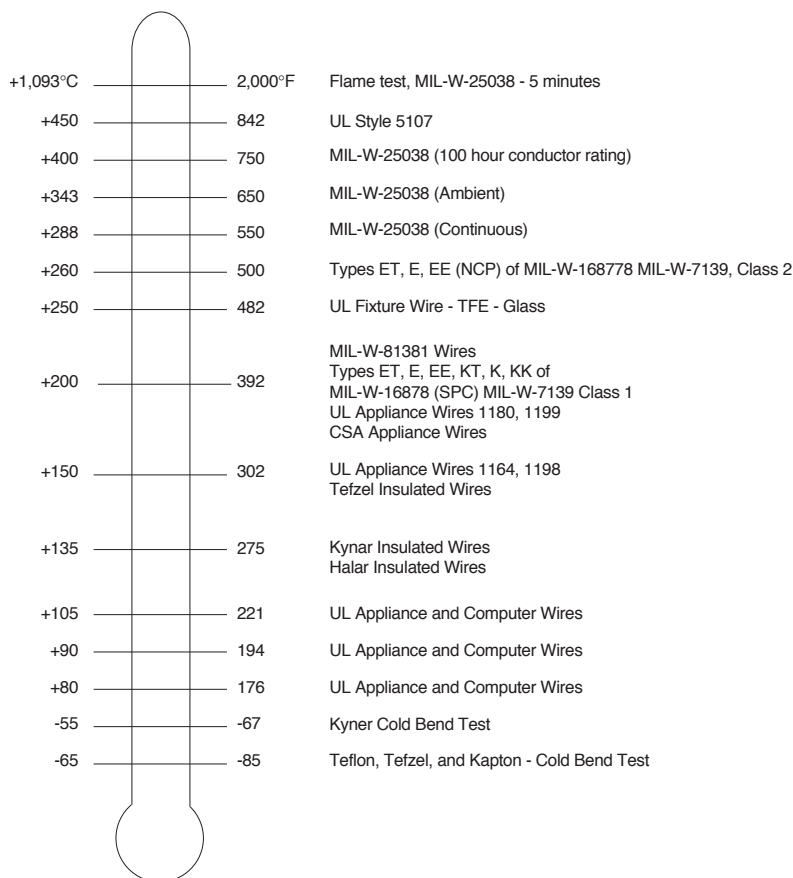

SAE Housing: Mounting Boss Dimensions

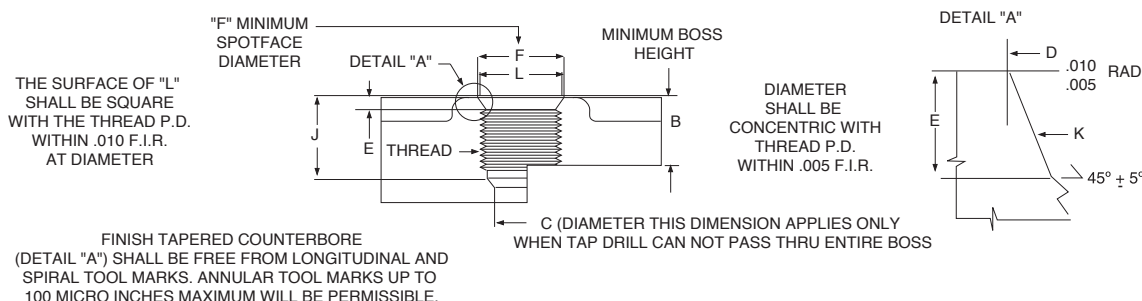

Dimensions for Industrial Straight Thread Fitting With "O" Ring Gaskets

Thread	Minimum Thread Depth	C Min.	D +.015 -.000	E +.015 -.000	F Min.	J Min.	K ±1°	L Min.
3/4-16 UNF-2B	.562	.391	.811	.100	1.188	.688	15°	.875
7/8-14 UNF-2B	.656	.484	.942	.100	1.344	.781	15°	1.000
1 ¹ / ₁₆ -12 UNF-2B	.750	.609	1.148	.130	1.625	.906	15°	1.250
1 ³ / ₁₆ -12 UNF-2B	.750	.719	1.273	.130	1.765	.906	15°	1.375

Physical Properties of Molding and Casting Compounds

Compound No.	Units	1469 / 1481	7113 / 1481	29885 / 1470	5041	Ryton R4
Type		Epoxy	Epoxy	Epoxy	Epoxy (Thermoset)	Thermoplastic
Use		General purpose casting compound	General Purpose casting compound	Explosion proof casting compound	Molding compound for housings	Molding compounds for housings
Color		Black	Blue	Black	Black	Black
Specific Gravity		2.3	2.3	2.3	1.84	1.67
Tensile Strength	psi (kg/cm ²)	8,400 (588)	8,400 (588)	8,400 (588)	11,000 (780)	17,500 (1,225)
Comprehensive Strength	psi (kg/cm ²)	22,500 (1,580)	22,500 (1,580)	16,000 (1,125)	30,000 (2,100)	21,000 (1,470)
Flexural Strength 23°	psi (kg/cm ²)	13,300 (931)	13,300 (931)	13,000 (914)	18,000 (1,260)	26,000 (1,820)
Flexural Modules 23°	psi (kg/cm ²)	2x10 ⁸ (1.4x10 ⁷)	2x10 ⁸ (1.4x10 ⁷)	--	--	17x10 ⁶ (1.2x10 ⁷)
Flexural Modules 260°	psi (kg/cm ²)	--	--	--	--	1,700,000 (119,00)
Maximum Temp. Service	°F (°C)	400 (205)	400 (205)	400 (205)	302 (150)	400 (205)
Deflection Temp. @ 264 psi	°F	--	--	--	200°F	500°F
IZOD Impact (FT Lbs./In.)		0.3	0.3	--	0.60	1.3
Coefficient of Expansion	°F (°C)	19.4X10 ⁻⁶ (35X10 ⁻⁶)	19.4X10 ⁻⁶ (35X10 ⁻⁶)	16.7X10 ⁻⁶ (30x10 ⁻⁶)	23X10 ⁻⁶ (11X10 ⁻⁶)	16X10 ⁻⁶ --
Water Absorbtion		0.03% in 3 days	0.036% in 3 days	0.10% in 24 hrs	0.25% in 48 hrs @50°C	0.5% in 1 day
Dielectric Constant 60Hz		6.5	6.5	6.6	--	--
Dielectric Constant 1Hz		6.3	6.3	6.3	--	3.9
Dielectric Constant 1MHz		5.01	5.01	6.0	4.7	4.0
Dissipation Factor 60Hz		0.02	0.02	.02	--	0.014
Dissipation Factor 1KHz		0.008	0.008	.01	--	--
Dissipation Factor 1MHz		.028	.028	.02	0.012	0.0014
Dielectric Strength	V mil (kv/mil)	365 (14.4)	365 (14.4)	490 (19.3)	400 (15.8)	450 (17.8)

Typical Insulation System Properties

THERMAL	PVC	Halar-E-CTFE	PVC-Mylar	Kynar	Teflon-PFA	Poly sulfone	FEP	Kapton	TFE	Tefzel ETFE
Maximum Continuous Rating (°C)	105	135	105	135	260	150	200	200	260	150
Low Temperature (°C)	-50	-100	-60	-70	-200	-100	-200	-200	-200	-100
Non-Flammability	Very Good	Excellent	Very Good	Excellent	Excellent	Good	Excellent	Excellent	Excellent	Excellent
Solder Resistant	Good	Very Good	Very Good	Very Good	Very Good	Very Good	Excellent	Excellent	Excellent	Excellent

ELECTRICAL	PVC	Halar-E-CTFE	PVC-Mylar	Kynar	Teflon-PFA	Poly sulfone	FEP	Kapton	TFE	Tefzel ETFE
Volume Resistivity (Ohm-cm)	10 ¹²	10 ¹³	10 ¹⁶	2x10 ¹⁴	10 ¹⁸	5x10 ¹⁶	2x10 ¹⁸	10 ¹⁸	10 ¹²	10 ¹⁶
Dielectric Strength VPM, 1/8" thick	350	490	(1mil film) 350	450	430	400	430	420	430	400
Dielectric Constant	5.70	2.60	3.50	7.70	2.06	3.13	2.00	2.40	2.00	2.60
Dissipation Factor (1kHz)	.09	.002	.03	.02	.0002	.001	0.4	.001	.0002	.0008

MECHANICAL	PVC	Halar-E-CTFE	PVC-Mylar	Kynar	Teflon-PFA	Poly sulfone	FEP	Kapton	TFE	Tefzel ETFE
Density (gm/cc)	1.36	1.68	1.48	1.76	2.15	1.24	2.18	1.68 (67% polyimide)	2.20	1.70
Tensile, psi	4,000	7,000	15,000	6,000	4,000	10,000	2,700	17,000	2,500	6,500
Elongation %	250	200	50	250	300	100	250	75	225	100-400
Abrasion Resistance	Fair	Fair	Good	Excellent	Good	Excellent	Good	Excellent	Good	Excellent
Cut-through Resistance	Good	Good	Excellent	Excellent	Fair	Excellent	Fair	Excellent	Fair	Excellent
Bondability	Good	Good	Good	Good	Poor (without special treatment)	Good	Poor (without bonding treatment)	Excellent	Poor (without bonding treatment)	Good

ENVIRONMENTAL	PVC	Halar-E-CTFE	PVC-Mylar	Kynar	Teflon-PFA	Poly sulfone	FEP	Kapton	TFE	Tefzel ETFE
		100						200		approx. 100
Nuclear Radiation	Fair	megarads	Fair	Excellent	Fair	Good	Fair	megarads	Fair	megarads
UV Radiation	Fair	Excellent	Fair	Excellent	Excellent	Fair	Excellent	Excellent	Excellent	Excellent

CHEMICAL	PVC	Halar-E-CTFE	PVC-Mylar	Kynar	Teflon-PFA	Poly sulfone	FEP	Kapton	TFE	Tefzel ETFE
Water Absorbtion	0.7%	.01%	.06%	.04%	.03%	.05%	.01%	.8%	.01%	.1%
Acids	Good	Excellent	Good	Very Good	Excellent	Good	Excellent	Fair	Excellent	Excellent
Alkali	Good	Excellent	Poor	Very Good	Excellent	Good	Excellent	Fair	Excellent	Excellent
Alcohol	Fair	Excellent	Fair	Very Good	Excellent	Fair	Excellent	Very Good	Excellent	Excellent
Cleaning Solvents (tri-chlor, carbon tetr.)	Slight Swell	Excellent	Good	Very Good	Excellent	Crazes	Excellent	Very Good	Excellent	Excellent
Aliphatic Hydrocarbons (gasolione, kerosene)	Slight Swell	Excellent	Fair	Very Good	Excellent	Good	Excellent	Very Good	Excellent	Excellent
Aromatic Hydrocarbons (benzene, toulene)	Slight Swell	Excellent	Fair	Very Good	Excellent	Crazes	Excellent	Very Good	Excellent	Excellent
Long Term Stability	Fair	Excellent	Good	Very Good	Excellent	Very Good	Excellent	Excellent	Excellent	Excellent

Index

A

Ampacities

Of conductors..... page 64

C

Cable

Cable and harness feedthrus (see Harness feedthrus)

Coaxial..... 35

Optical fibers..... 35

Connectors

37 pin vacuum connector (intermateable to DM5623)..... 28

Configurations..... 43

Insert positions..... 39

Nomenclature..... 42

Sealed connectors, Section on..... 12-43

Sets of sealed connectors and mates..... 40-41

Thermocouple alloys..... 37

Conversion Factors

Altitude..... 58

Leak rate..... 57

Temperature..... 58

Vacuum/pressure..... 58

Crimp Tools

Connector contacts..... 38

Cryogenic Feedthrus..... 55

F

Face Seal Housings

(Various face seal housings are available with all conductor configurations and sections)

Design variations..... 53

Face clamp..... 50

Large capacity..... 50

PotCon™ sealed connectors..... 12-43

ReadySeal™ sealed harnesses..... 4-11

Studs..... 44

Factory Mutual (see Fm)

Fiber Optic Cables, Sealed

Harness feedthrus..... 9

High pressure feedthrus..... 54

Special note
on customer furnished fibers..... inside back cover

FM Listed Materials or Devices..... 55

G

Glove Boxes, Feedthrus For

Connectors, Section on..... 12-43

Convenience outlets..... 52

Push-in..... 52

H

Harness Feedthru Assemblies

Custom designs..... 7-11

Section on..... 4-11

Standard designs..... 4-6

Heavy Current (See Stud Feedthru Assemblies)

High Pressure Feedthrus..... 54

High Temperature Seals..... 55

Housing

Design variations..... 53

Dimensions

Face clamp, large capacity..... 50

Flange..... 11

High pressure..... 54

NPT epoxy..... 10

NPT "in-line" (adapter)..... 10

NPT nipple..... 10

NPT plug..... 10

Pressure face seal..... 10

Radial "O" Ring..... 11

SAE..... 10

Vacuum face seal..... 11

Performance data..... 3, 64

I

Insulation

Availability of, for harness feedthrus..... 4-6, 9

Properties of..... 61

Selection of..... 59

L

Listed Devices (See UL)

M

Mates, Mating Connectors..... 34

MIL-C-XXXX

Available configurations..... 43

Crimp tools..... 38

Insert positions..... 39

PotCon™ sealed connectors..... 12-43

Thermocouple alloy contacts..... 36

Motor Terminals (See Stud Feedthru Assemblies)

N**NPT Housings**

(Plug, Nipple, In-line, Bullet hub, Epoxy)

(Various NPT housings are available with all conductor configurations and sections)

O**"O" Ring Housings**

(Various "O" Ring housings are available with all conductor configurations and sections)

Outgassing

Description.....	51
Of port plates.....	49
Vacuum baking service.....	51
Vacuum outgassing service.....	51

Optical Fibers *(See Fiber Optic Cables, Sealed)***P****Plates**

Motor terminals.....	47
Port plates.....	48

Plugs

110VAC convenience outlets.....	52
Sealed connectors, Section on.....	12-43
Push-in Feedthru Seals.....	52

Q**Quality Control**

Tests and limits.....	57
Tests on compounds.....	56

R**Receptacle**

110VAC convenience outlet.....	52
Sealed connectors, Section on.....	12-43

S**SAE Housings**

(SAE housing feedthrus are available with all conductor configurations and sections)..... 10, 59

Specifications

Epoxies and molding compounds.....	60
Harness feedthru assemblies.....	3
Housings-dimensions.....	10-11, 50, 54
Housings-pressure and temperature withstand charts.....	64
Insulations.....	61

Stud Feedthru Assemblies

Multi stud plates.....	47
Sealed studs/motor terminals.....	44-47
Vacuum face seal.....	46
Vacuum flange.....	46

T

TBFH (<i>Thru Bulkhead Feedthru</i>).....	26-27
---	-------

Technical Data	56-61
-----------------------------	-------

Thermocouple Alloy

Connector contacts, availability of.....	37
Connectors, sealed.....	36
Harness feedthrus (<i>See Harness feedthru assemblies</i>)	
Options and alternatives, discussion of.....	36
Thermometric constants and data.....	37

U

UL Listed Materials and Devices.....	55
--------------------------------------	----

Underwater



Harnesses (<i>See Harnesses</i>)	
High pressure.....	54

V**Vacuum Feedthrus***(Various conductor configurations suitable for high vacuum use are detailed in all sections)*

Flanges, connector.....	30-33
Flanges, harnesses.....	6, 11
Flanges, studs.....	46

Performance Summary Of Housings And Wires

Pressure and Vacuum

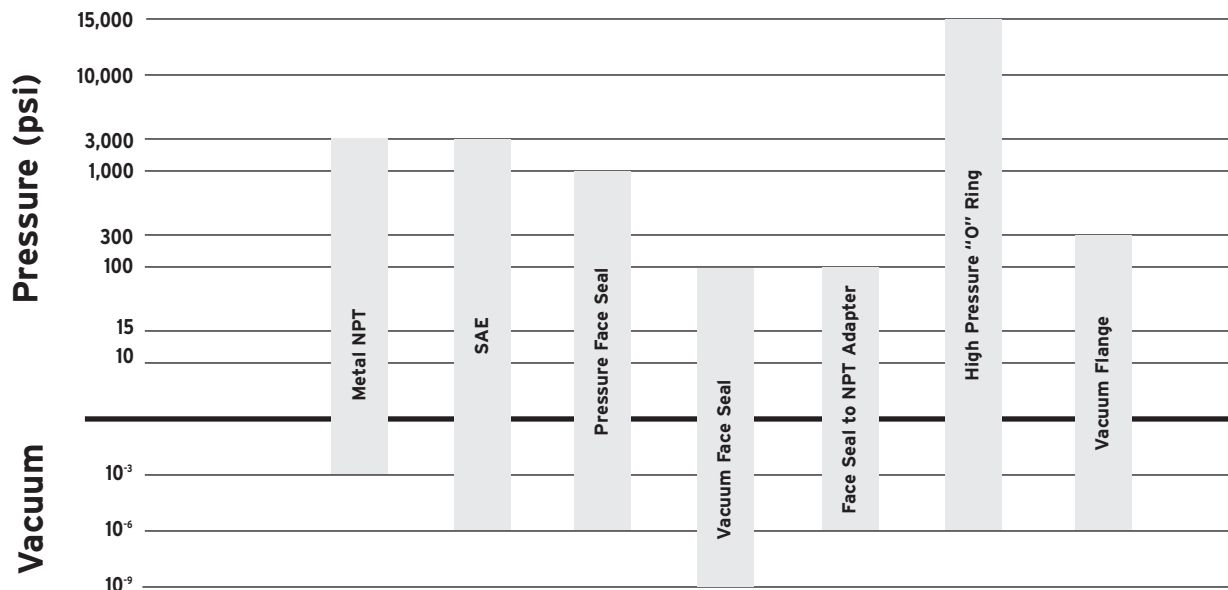

Temperature*	High Limit (°F)	+250	+250	+250	+250	+250	limited	+250
	Low Limit (°F)	-40	-40	-40	-40	-40	0	-40

*See temperature note on page 57.

Ampacity of Insulated Copper Conductors (In Air)

(For vacuum applications, derate by 50%)

AWG	105°C Wire Installation				150°C Wire Installation				200°C Wire Installation			
	1 Wire	2-5 Wires	6-15 Wires	16-30 Wires	1 Wire	2-5 Wires	6-15 Wires	16-30 Wires	1 Wire	2-5 Wires	6-15 Wires	16-30 Wires
30	3	2	2	2	3	2	2	2	4	3	2	2
28	4	3	3	2	5	4	4	3	6	5	3	3
26	5	4	4	3	6	5	4	3	7	6	4	4
24	7	6	5	4	8	6	6	4	10	8	6	5
22	10	8	7	5	12	10	8	6	13	10	7	7
20	13	10	9	7	15	12	11	8	17	14	10	9
18	18	14	13	9	21	17	15	11	24	19	13	12
16	24	19	17	12	27	22	19	14	32	26	18	16
14	33	26	23	17	42	34	29	21	45	36	25	23
12	45	36	32	23	53	42	37	27	55	44	31	28
10	58	46	41	29	74	59	52	37	75	60	42	38
8	75	60	53	38	95	76	67	48	100	80	56	50
6	105	84	74	53	131	105	92	66	135	108	76	68
4	145	116	102	73	179	143	125	90	180	144	101	90
2	200	160	140	100	236	189	165	118	240	192	134	120

Ordering Information

To order

You may place an order directly with our sales staff at 973.627.8230.

Technical Questions or Design Assistance

Please call our Product Engineering Department 973.627.8230.

Standard Terms and Conditions

Domestic shipments: All products are shipped F.O.B. Randolph, NJ. We offer a prompt payment discount of 1% 10 days, Net Cash 30 days to customers who have had their credit approved.

Prices and specifications are subject to change without notice.

Foreign shipments: All terms and conditions will be negotiated at time of order placement.

Note to Purchaser

While we believe all statements, representations, and recommendations are correct and reliable, we cannot guarantee accuracy or completeness. It is the user's responsibility to determine and confirm suitability for use. All sales of Douglas Electrical Components' products are subject to our Standard Terms and Conditions.

A copy of our Standard Terms and Conditions may be obtained by calling our Sales Administration Office at 973.627.8230.

Douglas Electrical will provide Special Certificates of Compliance, Test Reports, and certificates of origin but only if they are requested at the time of order.

Warranty

All products are warranted to be free of defects in materials and workmanship for a period of twelve months from date of shipment.

Our liability, unless explicitly changed by us, is strictly limited to the repair or replacement (at our option) of defective parts. Any defective parts must be returned to us in order to receive credit or replacement. Returned product must

be accompanied by an RMA number. RMA numbers may be obtained by calling our Sales Administration Office at 973.627.8230.

Customer Furnished Materials

On occasion, it is mutually convenient to use material furnished by our customer.

Work with customer furnished materials (CF Materials) will be at "mutual risk," where we will exercise reasonable care and caution in handling but we will not assume any responsibility for that material in the event of breakage, loss or functional failure of the finished part.

Where there is a loss, our responsibility will be limited solely to repair/replacement of our materials and/or labor, not for CF Materials.

Special Note for Optical Fibers

Processing of optical fibers is risky. While we are very diligent in processing fibers, they are very delicate and prone to fracture. Please discuss including spare fibers in your part. Due to many variables in the manufacture of fibers, we generally insist on receiving an extra meter or two of fiber for "proving" our processing and material.

In addition, the fibers we use for evaluation testing may sometimes be significantly different than those we receive for production, (CF Materials or not). In this event, we cannot be responsible for performance.

Errors

While we believe that all information in this catalog is accurate and correct, we do not take responsibility for typographical errors.

To Contact Us


Phone: 973.627.8230

Toll Free: 1.800.533.8068

Fax: 866.206.6916

Our hours are Monday through Friday from 8:00am to 4:30pm EST.

Vacuum or Pressure Feedthru Products



Ductorseal Hermetic Feedthrus offer standard or custom wires hermetically sealed to a wide variety of housing designs and sizes. They are easy to specify solutions to pressure or vacuum penetration problems and can include from 1 to 1,000's of individual conductors, from vacuum to 10,000+ PSI.



PotCon™ Feedthrus incorporate standard connectors and/or wire harnesses in a single fully sealed housing. Virtually any connector may be specified and sealed to the housing for reliable mounting for vacuum or pressure use.



OptiSeal™ Feedthrus now allow you to specify a hermetic seal on your fiberoptic cable(s) or connectors for vacuum or pressure use in any of our standard housings or in special housings. Multiple channel feedthrus are available.



StudSeal™ Hermetic Stud Feedthrus seal large copper studs in three housing configurations and in a wide range of sizes. They are useful for vacuum or pressure applications where heavy current or high voltages penetrate a barrier.



Vacuum Flange Hermetic Feedthrus seal virtually any conductor (including fiberoptics, thermocouples, shielded wires, etc.) in standard vacuum fittings. These units are suitable for use to 10^{-7} mm Hg.

Custom Interconnect Cables or Assemblies are also available to provide a fully engineered solution for one-stop vacuum or pressure penetration requirements.

Additional Capabilities to our standard lines of hermetically sealed feedthrus, we also offer:

- Standoffs
- Splash proof feedthrus
- Strain reliefs
- Dust proof feedthrus
- Custom application specific designs with special housings, conductors or environments



Douglas Electrical Components

5 Middlebury Blvd
Randolph, NJ 07869
T 973.627.8230 F 866.206.6916
www.douglaselectrical.com



Certificate No. 3415